
# UNIQ<sup>®</sup>FOAM 131 S



Silicone free defoamer

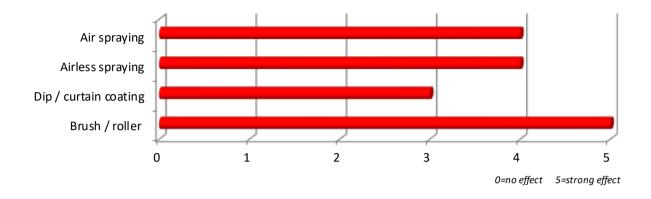

**UNID**<sup>®</sup>**FDAM 131 S** is strong defoamer mainly suitable for pigmented coating systems. Due the chemical structure the product will not cause turbidity, but will over good air-release and macro defoaming properties. The product is well suited for spraying applications.

d

## **Special Features**

- Strong defoamer
- Suitable for pigment systems
- Does not interfere intercoat adhesion
- Silicone-free
- Heat stable

Application			
Γ	PE primers		
Ī	Polyurethane systems		
	NC systems		
	Baking systems		
-			

highly recommended ■ recommended □

#### **Product Specification**

Density 20°C	0.94 g/cm <sup>3</sup>
Color	Max. 1
Appearance	Yellowish clear liqui

## Packaging

- 25 kg
- 170 kg

## **Addition levels**

• Based on total formulation: 0.1-1.0 %

Due to its strong incompatibility; gloss, transparency and potentially other defect should be evaluated in the varnish system.

### Shelf life

**LNIC**<sup>®</sup>**FDAM 131 S** should be stored in a cool dry place. When kept in an original unopened container, it will keep up to 5 years from the date of manufacture.

Regional headquarters

 UNIQ®FOAM, UNIQ®FLOW, UNIQ®W ET, UNIQ®SPERSE, UNIQ®LIGHT, UNIQ®COLOR, UNIQ®MICA, UNIQ®CURE, UNIQ®JET

 This information is given to the best of our knowledge. Because of the multitude of formulations, production and application conditions, all the above mentioned statements have to be adjusted to the circumstances of the processor.

 No liabilities, including those for patent rights, can be derived from this fact for individual cases.

 This datasheets replaces all previous issues – Printed in UK

 © Copyright UNIQCHEM (UK) CO., LTD.

 Asia:
 UNIQCHEM Shanghai Co., Ltd.

 Tel: +86 21 5433 6480
 asia@uniqchem.com

 EMEA:
 UNIQCHEM GmbH