


UNIQ[®] FOAM 150 S

Silicone free defoamer

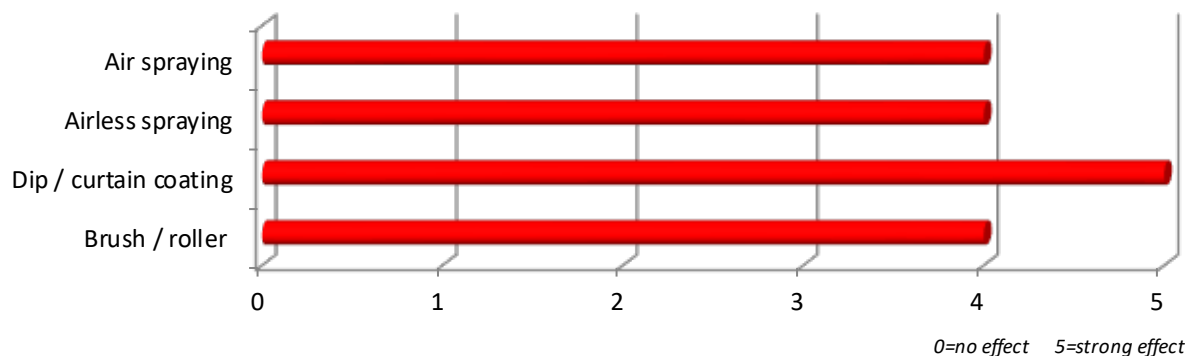

UNIQ[®] FOAM 150 S is a strong defoamer can be used for all solvent borne coating systems, especially suitable for solvent free epoxy and solvent free UV system. The additive has an immediate foam-destroying effect with very strong deaeration and does not have influence on the intercoat adhesion.

With epoxy resin the defoamer can give slight haziness, but as soon the hardener is added the products becomes fully clear. Therefore the product is suited for pigmented and non pigmented systems.

Special Features

- Solvent-borne and solvent free applications
- Strong defoaming and deaeration effect
- Does not interfere intercoat adhesion
- Silicone-free
- Heat stable

Application

Architectural coatings	
Wood and furniture coatings	■
Automotive and refinish coatings	■
Can/coil coatings	■
Industrial coatings	■

highly recommended ■

recommended □

Product Specification

Density 20°C
Appearance

1.0 g/cm³
Clear colorless liquid

Addition levels

- Based on total formulation: 0.1 – 1.0 %
Can be added in any stage of the formulation.

Due to its strong incompatibility, the influence upon the transparency of clear systems or other surface defects must be evaluated.

Packaging

- 25 kg
- 190 kg

Shelf life

UNIQ[®] FOAM 150 S should be stored in a cool dry place. When kept in an original unopened container, it will keep up to 5 years from the date of manufacture.