
UNIQ®FOAM 152 S



Silicone free polymer defoamer

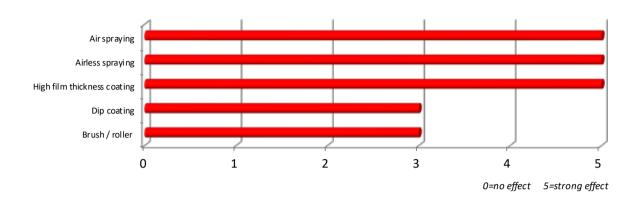

UNIQ FOAM 152 S is a strong silicone free defoamer can be used for all solvent borne coating systems, especially suitable for solvent free self-leveling epoxy system. The additive has excellent defoaming and strong de-aeration, and not influence on the intercoat adhesion. At the same time, it will improve the leveling properties and give excellent film appearance in high gloss systems and will give good compatibility.

Special Features

- Quick de-aeration and defoaming effect for pigmented solvent free epoxy system
- Does not interfere intercoat adhesion
- Excellent film appearances
- Silicone-free
- Heat stable

Application

Architectural coatings	
Wood and furniture coatings	
Automotive and refinish coatings	
Can/coil coatings	
Protective coatings	
Industrial coatings	

highly recommended \blacksquare recommended \square

Product Specification

Solvent

Density 20°C Refractive index Color Appearance PMA / Hydrocarbons C9 aromatics 0.92 g/cm³ 1.480 Max. 1 Slight hazy colorless liquid

Addition levels

Based on total formulation:

0.1 - 1.0%

Added in grinding stage or under high shear forces incorporation.

Although the product may be slightly turbid, this cannot be observed anymore in the final dry film.

Packaging

- 22 kg
- 170 kg

Shelf life

UNIQ[®]**FOAM 152 S** should be stored in a cool dry place. When kept in an original unopened container, it will keep up to 5 years from the date of manufacture.

UNIQCHEM (UK) CO., LTD

www.uniqchem.com