


# UNIQ<sup>®</sup> FOAM 170 S

Solution of non-silicone defoaming polymers

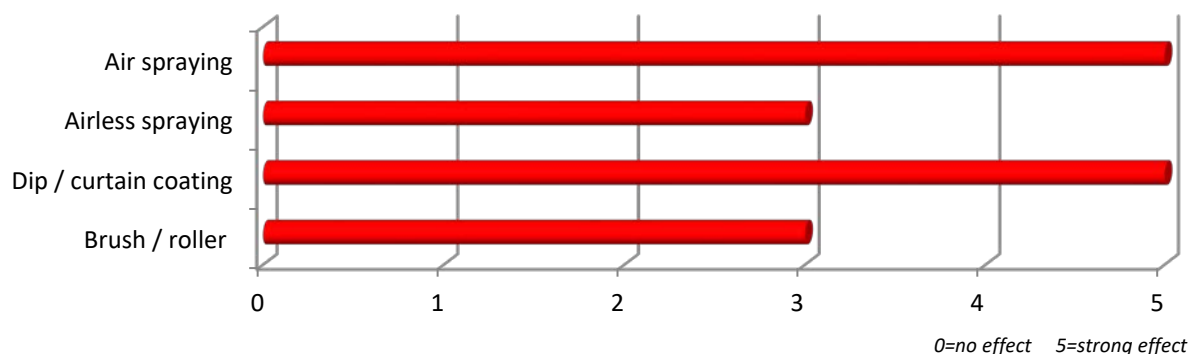

**UNIQ<sup>®</sup> FOAM 170 S** is a strong anti-foam and air-release agent especially suitable for use in unsaturated polyesters, baking coatings, epoxies and acrylic/vinyl acetate combinations. The additive furthermore helps to improve the leveling.

## Special Features

- Quick de-aeration and defoaming effect for thermosetting resin system
- Suitable for pigment loading coating systems
- does not interfere intercoat adhesion
- Silicone-free
- Heat stable

## Application

Architectural coatings	<input type="checkbox"/>
Wood and furniture coatings	<input checked="" type="checkbox"/>
Automotive and refinish coatings	<input checked="" type="checkbox"/>
Can/coil coatings	<input checked="" type="checkbox"/>
Industrial coatings	<input checked="" type="checkbox"/>

highly recommended

recommended

## Product Specification

Density 20°C  
Color  
Appearance

0.83 g/cm<sup>3</sup>  
Max. 1  
Slightly hazy colorless liquid

## Addition levels

- Based on total formulation: 0.1 – 1.0 %  
Added in grinding stage or under high shear forces incorporation.

## Packaging

- 22 kg
- 170 kg

## Shelf life

**UNIQ<sup>®</sup> FOAM 170 S** should be stored in a cool dry place. When kept in an original unopened container, it will keep up to 5 years from the date of manufacture.