


UNIQ®FOAM 180 W

Water based leveling and anti-popping agent

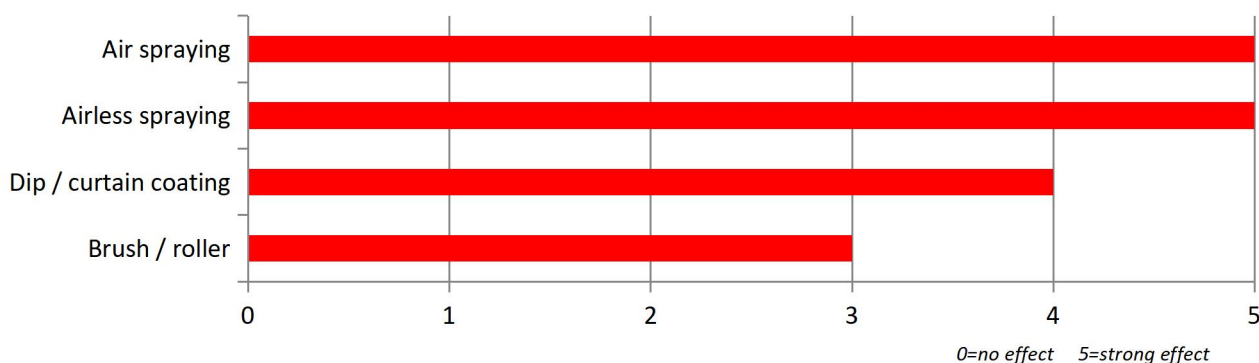

UNIQ®FOAM 180 W is a silicone-free surface additive for aqueous coatings to prevent surface defects such as cratering, popping, bubbles, pinholes, orange peel and boiling marks and to improve leveling.

Special Features

- Water based applications
- Improve leveling
- Anti-foam and anti-popping in baked system
- Silicone-free
- Heat stable

Application

| | |
|----------------------------------|---|
| Architectural coatings | ■ |
| Wood and furniture coatings | ■ |
| Automotive and refinish coatings | ■ |
| Can/coil coatings | ■ |
| Industrial coatings | ■ |

highly recommended ■
recommended □

Product Specification

Density 20 °C
Appearance

0.81 g/cm³
clear liquid

Addition levels

- Based on total formulation: 0.3 – 3.0 %
Added in grinding stage or under high shear forces incorporation.

Packaging

- 20 kg
- 150 kg

Shelf life

UNIQ®FOAM 180 W should be stored in a cool dry place. When kept in an original unopened container, it will keep up to 3 years from the date of manufacture. At low temperature the product may become turbid, this will not affect the product performances.