


UNIQ[®] FOAM 245 S

Silicone defoamer with modification of fluorocarbon

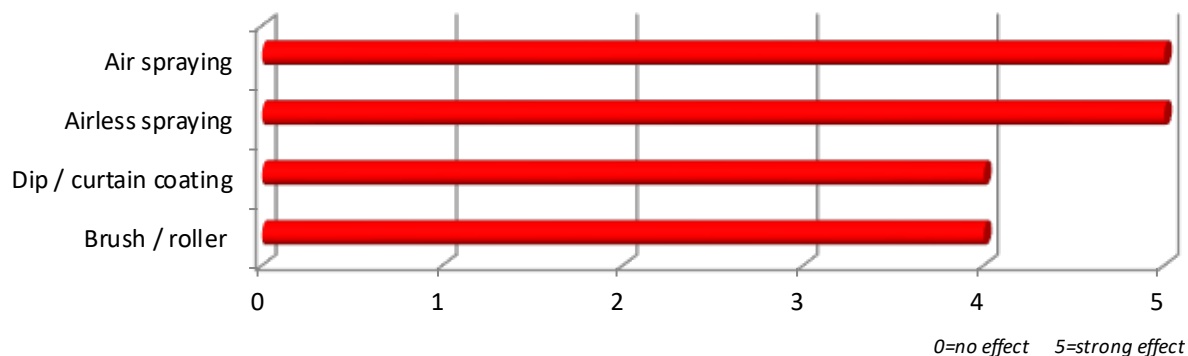

UNIQ[®] FOAM 245 S is recommended for roller, brush and conventional spray application, also suitable for low polar to high polar system, and shows excellent against micro-foam performance. The defoamer is highly effective for solvent based and solvent free coating systems, which offers optimal defoaming at a very low percentage.

Special Features

- suited for medium viscosity for spray, brush and roller application
- Well suited for curtain coating applications
- micro foam destroying properties
- rather good compatibility

Application

Architectural coatings	■
Wood and furniture coatings	■
Automotive and refinish coatings	■
Can/coil coatings	□
Industrial coatings	■
Protective coatings	■

highly recommended ■
recommended □

Product Specification

Density 20 °C	0.80 g/cm ³
Refractive index	1.414
Color	Max. 1
Appearance	Clear colorless liquid

Addition levels

- Based on total formulation: 0.1 – 0.6 %
Added before grinding.

Packaging

- 20 kg
- 150 kg

Shelf life

UNIQ[®] FOAM 245 S should be stored in a cool dry place. When kept in an original unopened container, it will keep up to 5 years from the date of manufacture.