


UNIQ[®] FOAM 272 S

Solution of silicone defoaming polymers

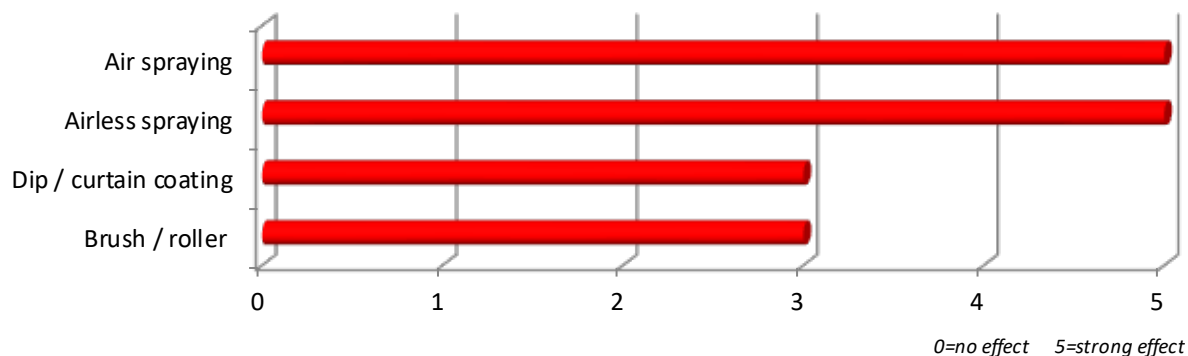

UNIQ[®] FOAM 272 S is a strong anti-foam and air-release agent especially suitable for use in unsaturated polyesters, epoxies and acrylic resin systems. The product is especially suitable for self-leveling epoxy systems where it will give very fast air-release and defoaming properties. The additive furthermore helps to improve the leveling.

Special Features

- Quick de-aeration and defoaming effect for pigmented solvent free epoxy flooring
- does not interfere intercoat adhesion
- improve leveling
- Heat stable

Application

Architectural coatings	<input type="checkbox"/>
Wood and furniture coatings	<input checked="" type="checkbox"/>
Automotive and refinish coatings	<input type="checkbox"/>
Can/coil coatings	<input type="checkbox"/>
Protective coatings	<input checked="" type="checkbox"/>
Industrial coatings	<input checked="" type="checkbox"/>

highly recommended
recommended

Product Specification

Density 20°C	0.91 g/cm ³
Color	Max. 3
Appearance	Clear colorless liquid

Addition levels

- Based on total formulation: 0.1 – 1.0%
Added in grinding stage or under high shear forces incorporation.

Packaging

- 22 kg
- 170 kg

Shelf life

UNIQ[®] FOAM 272 S should be stored in a cool dry place. When kept in an original unopened container, it will keep up to 5 years from the date of manufacture. At low temperature the product may become turbid, this will not affect the product performances.