


UNIQ[®] FOAM 280 W

Water based silicone defoamer

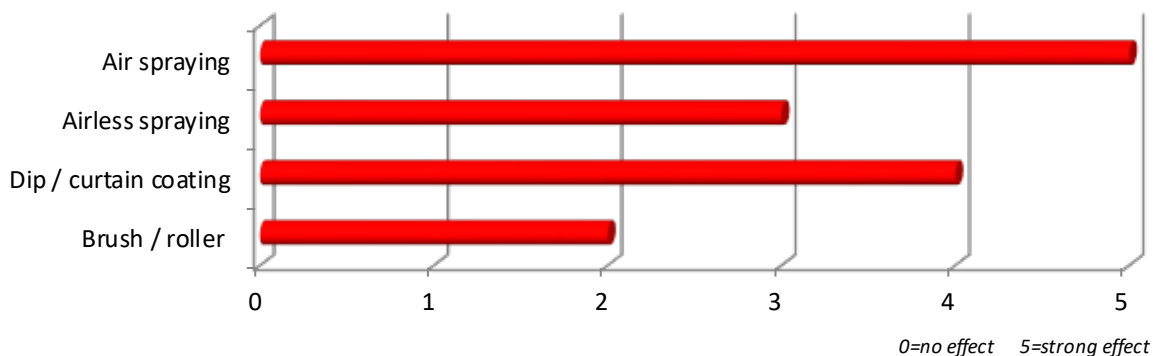

UNIQ[®] FOAM 280 W is recommended for high gloss emulsion systems based on acrylate/polyurethane and polyurethane in the pigment volume concentration range 0-25. The additive is effective when used in all traditional application such as rolling, brushing, spraying and pouring.

Special Features

- Water based applications
- suitable for high gloss system
- Long term persistent
- Silicone based
- Heat stable

Application

Architectural coatings	<input type="checkbox"/>
Wood and furniture coatings	<input checked="" type="checkbox"/>
Automotive and refinish coatings	<input checked="" type="checkbox"/>
Can/coil coatings	<input checked="" type="checkbox"/>
Industrial coatings	<input checked="" type="checkbox"/>

highly recommended

recommended

Product Specification

Density 20 °C
Appearance

1.01 g/cm³
Clear liquid

Addition levels

- Based on total formulation: 0.1 – 1.0 %

Packaging

- 25 kg
- 190 kg

Shelf life

UNIQ[®] FOAM 280 W should be stored in a cool dry place. When kept in an original unopened container, it will keep up to 2 years from the date of manufacture. At low temperature the product may become turbid, this will not affect the product performances.