


UNIQ[®] FOAM P-509

Solution of silicone free defoaming polymers

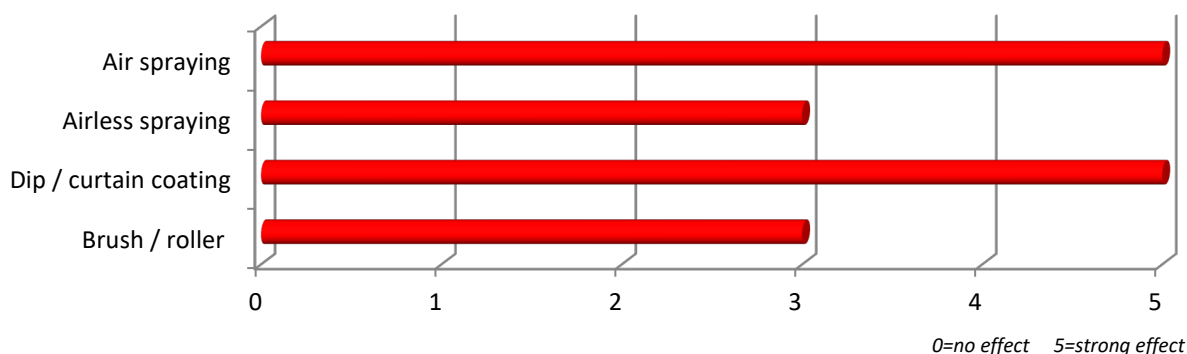

UNIQ[®] FOAM P-509 is a strong anti-foam and air-release agent especially suitable for ambient-curing plastic systems. Especially suitable for unsaturated polyesters and epoxy based systems.

Special Features

- Quick de-aeration and defoaming effect
- Foam reduction during manufacturing
- Suitable for pigment loading coating systems
- Can cause cloudiness in transparent systems
- Silicone-free
- Heat stable

Application

Ambient curing plastic	
UPE	■
Epoxy	■

highly recommended ■
recommended □

Product Specification

Density 20°C
Color
Appearance

0.89 g/cm³
Max. 3
Slight hazy liquid

Addition levels

- Based on total formulation: 0.1 – 1.0 %
Added in grinding stage or under high shear forces incorporation. Ensure good distribution to avoid craters.

Packaging

- 25 kg
- 170 kg

Shelf life

UNIQ[®] FOAM P-509 should be stored in a cool dry place. When kept in an original unopened container, it will keep up to 5 years from the date of manufacture.

UNIQCHEM (UK) CO., LTD

www.uniqchem.com
Info@uniqchem.com

Regional headquarters

UNIQ[®]FOAM, UNIQ[®]FLOW, UNIQ[®]WET, UNIQ[®]SPERSE, UNIQ[®]LIGHT, UNIQ[®]COLOR, UNIQ[®]MICA, UNIQ[®]CURE, UNIQ[®]JET
This information is given to the best of our knowledge. Because of the multitude of formulations, production and application conditions, all the above mentioned statements have to be adjusted to the circumstances of the processor.
No liabilities, including those for patent rights, can be derived from this fact for individual cases.
This datasheet replaces all previous issues – Printed in UK
© Copyright UNIQCHEM (UK) CO., LTD.

Asia: UNIQCHEM Shanghai Co., Ltd.
EMEA: UNIQCHEM GmbH
Naphta: UNIQCHEM USA

Tel: +21 5433 6480
Tel: +49 5921 853 7428

asia@uniqchem.com
eu@uniqchem.com
us@uniqchem.com