


UNIQ[®] FLOW 310 S

Wetting and leveling agent

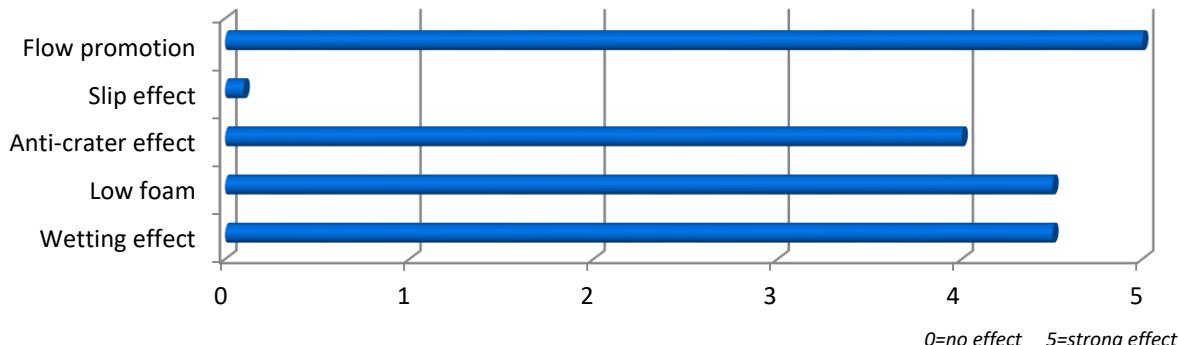

UNIQ[®] FLOW 310 S is mixture of oligomeric substances with wetting agents, provides reduction of surface tension and offers good wetting of critical substrates. In pigmented systems it can prevent the formation of Bénard cells and improve leveling. It has good compatibility with binders including PE/PUR/Epoxy/polyurea resins, and shows good transparency in clear coat. It has good anti-foam performance.

Special Features

- Good substrate wetting
- Improve leveling
- Low foam
- Excellent compatibility and transparency in clear coat

Application

Architectural coatings	<input checked="" type="checkbox"/>
Wood and furniture coatings	<input checked="" type="checkbox"/>
Automotive and refinish coatings	<input checked="" type="checkbox"/>
Can/coil coatings	<input checked="" type="checkbox"/>
Protective coatings	<input checked="" type="checkbox"/>
Industrial coatings	<input checked="" type="checkbox"/>

highly recommended

recommended

Product Specification

Active ingredients	100 %
Density 20°C	0.89 g/ cm ³
Epoxy equivalent	240-310g/eq%
Appearance	Colourless clear liquid

Addition levels

- Based on total formulation: 0.1 – 3.0 %

Packaging

- 22 kg
- 170 kg

Shelf life

UNIQ[®] FLOW 310 S should be stored in a cool dry place. When kept in an original unopened container, it will keep up to 3 years from the date of manufacture. At low temperature the product may become turbid, this will not affect the product performances.