


UNIQ[®] FLOW 350 W

Polymeric Fluorocarbon compound leveling agent

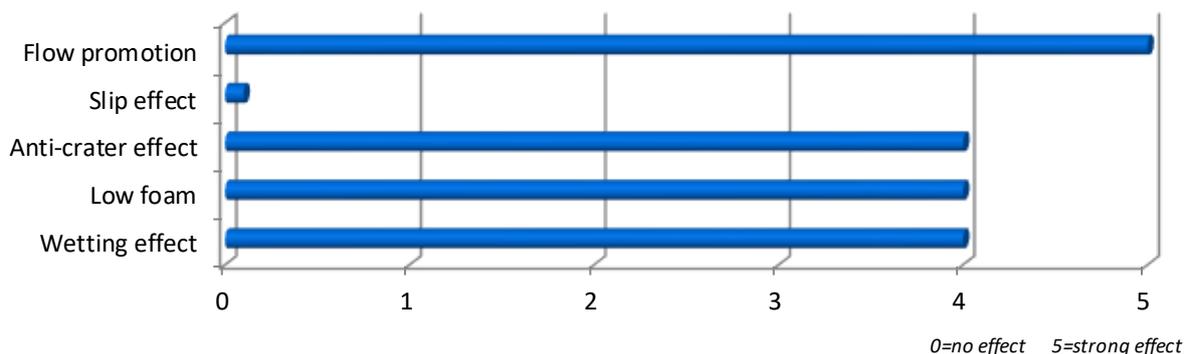

UNIQ[®] FLOW 350 W is a silicone free and can offer strong reduction of surface tension and improves wetting effect, gives strong anti-crater and is very low foaming. Meanwhile, it shows the good performance of fast wetting and leveling on difficult corners to achieve good film build up. **UNIQ[®] FLOW 350 W** is based on a new chemistry technology developed by UNIQCHEM.

Special Features

- Suitable for water-, solvent-borne and solvent free applications including UV
- Excellent leveling, long wave-effect
- Silicone free anti-crater agent
- Excellent substrate wetting
- Good defoaming properties
- pH independent
- No intercoat adhesion problems
- Heat stable, suitable for high baking systems

Application

Architectural coatings	■
Wood and furniture coatings	■
Automotive and refinish coatings	■
Can/coil coatings	■
Protective coatings	■
Industrial coatings	■

highly recommended ■
recommended □

Product Specification

Active ingredients	100 %
Density 20°C	1.12 g/cm ³
Color	Max. 10
Appearance	Slight turbid brownish liquid

Addition levels

- Based on total formulation: 0.1 – 1.0 %

UNIQ[®] FLOW 350 W is slight turbid, when mixed into the formulation it will become completely soluble and the turbidity will be disappear.

Packaging

- 25 kg
- 210 kg

Shelf life

UNIQ[®] FLOW 350 W should be stored in a cool dry place. When kept in an original unopened container, it will keep up to 5 years from the date of manufacture.