


UNIQ[®] FLOW 352 W

Wetting and leveling agent

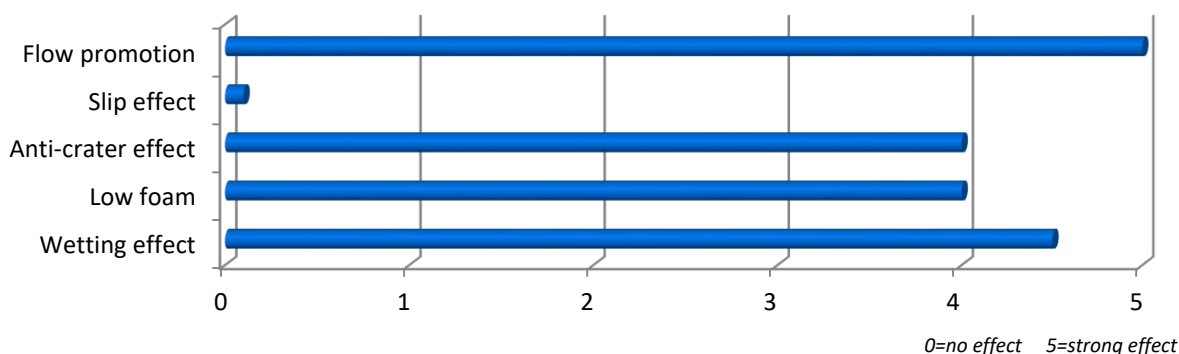

UNIQ[®] FLOW 352 W is a non-ionic polymeric wetting and leveling agent which is effective in a wide variety of emulsion resins. It has excellent substrate wetting performance and improves the paint's leveling. It doesn't stabilize foam, even shows good defoaming property. Due to good compatibility with all kind of resins **UNIQ[®] FLOW 352W** doesn't show negative effects to coating performances such as gloss, anti-corrosion and intercoat adhesion.

Special Features

- Predominantly suited for water based system
- Silicon free, no effect on inter layer adhesion
- Excellent leveling
- Good anti-crater performance
- Good substrate wetting
- Good defoaming property
- High temperature resistant
- Solvent free

Application

Architectural coatings	<input type="checkbox"/>
Wood and furniture coatings	<input checked="" type="checkbox"/>
Automotive and refinish coatings	<input checked="" type="checkbox"/>
Can/coil coatings	<input checked="" type="checkbox"/>
Protective coatings	<input checked="" type="checkbox"/>
Industrial coatings	<input checked="" type="checkbox"/>

highly recommended ☒

recommended ☐

Product Specification

Active ingredients
Density 20°C
Appearance

100 %
0.96 g/ cm³
Colorless Transparent
Liquid

Addition levels

- Based on total formulation: 0.1 – 1.0 %

Packaging

- 22 kg
- 180 kg

Shelf life

UNIQ[®] FLOW 352 W should be stored in a cool dry place. When kept in an original unopened container, it will keep up to 3 years from the date of manufacture. At low temperature the product may become turbid, this will not affect the product performances.