


UNIQ[®] FLOW 352 W

Water based hyper-branched polymeric wetting and leveling agent

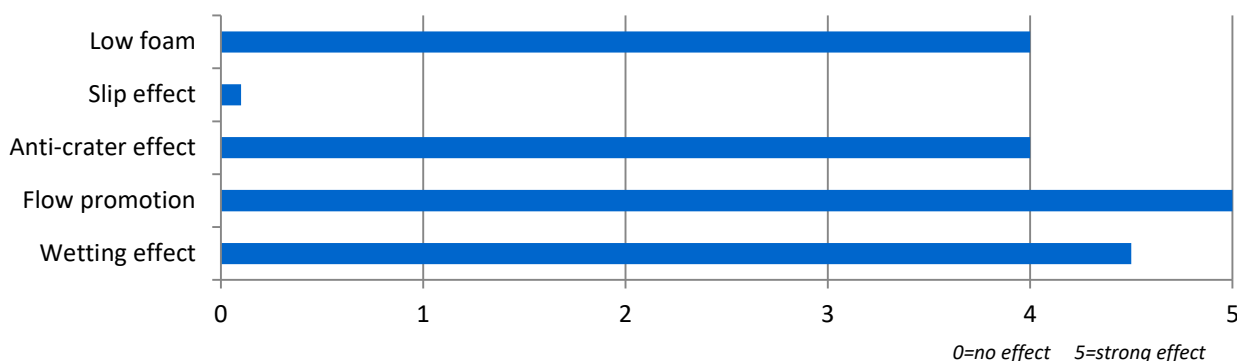

UNIQ[®] FLOW 352W is a non-ionic hyper-branched polymeric wetting and leveling agent which is effective in a wide variety of emulsion resins. It has excellent substrate wetting performance and improves the paint's leveling. It doesn't stabilize foam, even shows good defoaming property. Due to good compatibility with all kind of resins **UNIQ[®] FLOW 352W** doesn't show negative effects to coating performances such as gloss, anti-corrosion and intercoat adhesion.

Special Features

- Predominantly suited for water based system
- Hyper-branched polymer
- Silicon free, no effect on inter layer adhesion
- Excellent leveling
- Good anti-crater performance
- Good substrate wetting
- Good defoaming property
- High temperature resistant
- Solvent free

Application

Architectural coatings	<input type="checkbox"/>
Wood and furniture coatings	<input checked="" type="checkbox"/>
Automotive and refinish coatings	<input checked="" type="checkbox"/>
Can/coil coatings	<input checked="" type="checkbox"/>
Protective coatings	<input checked="" type="checkbox"/>
Industrial coatings	<input checked="" type="checkbox"/>

highly recommended

recommended

Product Specification

Active ingredients	100 %
Density 20°C	0.96 g/ cm ³
Appearance	Colorless Transparent Liquid

Addition levels

Based on total formulation: 0.1 – 1.0 %

Packaging

- 22 kg
- 180 kg

Shelf life

UNIQ[®] FLOW 352W should be stored in a cool dry place. When kept in an original unopened container, it will keep up to 3 years from the date of manufacture.