


UNIQ[®] FLOW 430 S

Organically modified polysiloxane

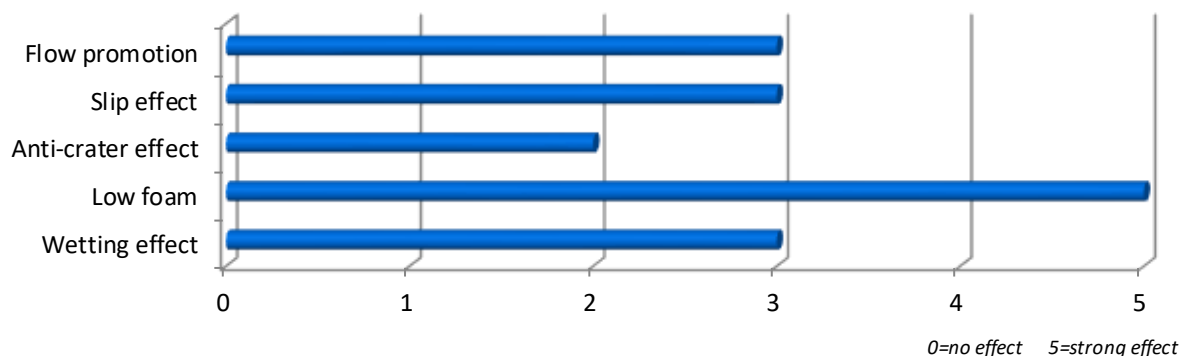

UNIQ[®] FLOW 430 S is allyl/alkyl modified polysiloxane leveling agents with some strong defoaming performances, particularly for non-polar to medium polar systems. It helps to prevent problems with ghosting and telegraphing when it is used in the layer that will be recoated. **UNIQ[®] FLOW 430 S** also helps to improve the matting agent orientation at the surface to avoid clouding.

Special Features

- Excellent defoaming effect, especially against micro foam
- Suitable for baking system
- Minimal influence on intercoat adhesion
- Less suited for high gloss clear coatings
- Improves matting agents orientation

Application

Architectural coatings	■
Wood and furniture coatings	■
Automotive and refinish coatings	■
Can/coil coatings	□
Protective coatings	■
Industrial coatings	■

highly recommended ■
recommended □

Product Specification

Active ingredients	100 %
Density 20 °C	0.97 g/cm ³
Color	Max. 2
Appearance	Slight yellowish liquid

Addition levels

- Based on total formulation: 0.1 – 1.0%

Packaging

- 25 kg
- 190 kg

Shelf life

UNIQ[®] FLOW 430 S should be stored in a cool dry place. When kept in an original unopened container, it will keep up to 2 years from the date of manufacture. At low temperature the product may become turbid, this will not affect the product performances.