


# UNIQ<sup>®</sup> FLOW 477 U

Organically modified polysiloxane

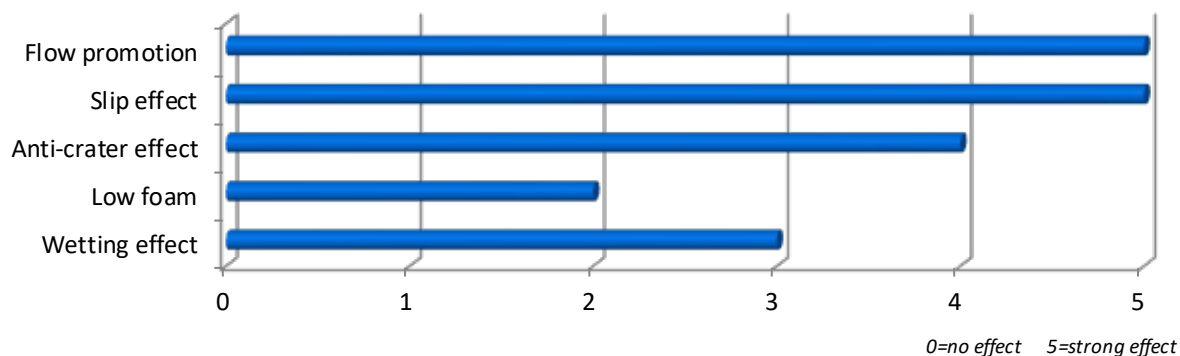

**UNIQ<sup>®</sup> FLOW 477 U** is modified polyether polysiloxane leveling agents. The product can offer strong reduction of surface tension and improves wetting effect and anti-crater effect of substrate. Meanwhile, it shows the good performance of fast leveling with excellent hand feeling and slip effect.

## Special Features

- Used in waterborne, radiation-curing and solvent borne and solvent free formulations
- Good substrate wetting
- Improve slip hand feeling
- Low foaming
- Good clarity
- Good recoatability
- Improves scratch resistance

## Application

Architectural coatings	■
Wood and furniture coatings	■
Automotive and refinish coatings	■
Can/coil coatings	
Protective coatings	■
Industrial coatings	■

highly recommended ■  
recommended □

## Product Specification

Active ingredients	93 %
Density 20°C	1.04 g/cm <sup>3</sup>
Color	Max. 2
Appearance	Clear liquid

## Addition levels

- Based on total formulation: 0.1 – 1.0 %

## Packaging

- 25 kg
- 190 kg

## Shelf life

**UNIQ<sup>®</sup> FLOW 477 U** should be stored in a cool dry place. When kept in an original unopened container, it will keep up to 3 years from the date of manufacture. At low temperature the product may become turbid, this will not affect the product performances.