
UNIQ®FOAM 155 S



Silicone free defoamer

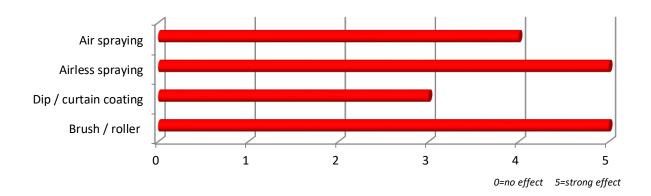

UNIQ FOAM 155 S is a strong defoamer can be used for all solvent borne and solvent free coating systems, especially suitable for solvent free UV system. The additive has an immediate foam-destroying effect with very strong deaeration and does not have influence on the intercoat adhesion. At the same time, this product can improve the leveling performance.

The compatibility needs to be checked, especially in clear coats.

Special Features

- Solvent-borne and solvent free applications
- Strong defoaming and deaeration effect
- Improve the leveling performance
- Does not interfere intercoat adhesion
- Silicone-free
- Heat stable

Application

Architectural coatings	
Wood and furniture coatings	
Automotive and refinish coatings	
Can/coil coatings	
Pigment concentrates	
Protective coatings	
Industrial coatings	

highly recommended ■

recommended 🗖

Product Specification

Active ingredients Density 20°C Appearance 96 % 1.00 g/cm³ Clear colorless liquid

Addition levels

• Based on total formulation: 0.1 - 1.0%Can be added in any stage of the formulation.

Check compatibility especially in clear coats.

Packaging

- 25 kg
- 190 kg

Shelf life

UNIQ FOAM 155 S should be stored in a cool dry place. When kept in an original unopened container, it will keep up to 5 years from the date of manufacture.

UNIQCHEM (UK) CO., LTD

www.uniqchem.com Info@uniqchem.com