


UNIQ[®]FOAM 158 S

Silicone free polymer defoamer

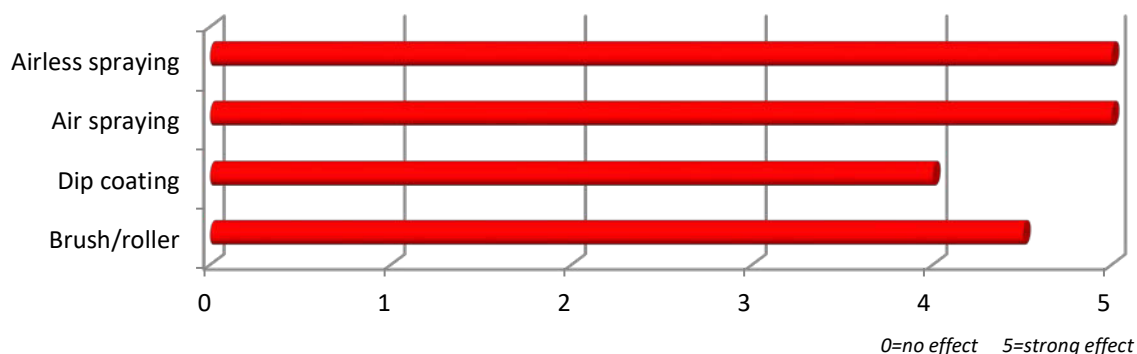

UNIQ[®]FOAM 158 S Silicone-free, polymer-based defoamer for solvent-free, radiation-curing wood and industrial coatings, printing inks and adhesives. Suitable for pigmented and unpigmented coating systems. The high efficiency of the defoamer is not impacted by pigments, fillers, wax additives or matting agents.

Special Features

- Quick de-aeration and defoaming effect
- Does not interfere intercoat adhesion
- Silicone-free
- Heat stable

Application

Architectural coatings	<input type="checkbox"/>
Wood and furniture coatings	<input checked="" type="checkbox"/>
Automotive and refinish coatings	<input checked="" type="checkbox"/>
Can/coil coatings	<input checked="" type="checkbox"/>
UV coating	<input checked="" type="checkbox"/>
Industrial coating	<input checked="" type="checkbox"/>

highly recommended ☒

recommended ☐

Product Specification

Active ingredient	100 %
Density 20°C	0.83 g/cm ³
Color	Max. 2
Appearance	Clear colorless liquid

Addition levels

- Based on total formulation: 0.1 – 1.0 %
Added in grinding stage or under high shear forces incorporation.

Packaging

- 20 kg
- 160 kg

Shelf life

UNIQ[®]FOAM 158 S should be stored in a cool dry place. When kept in an original unopened container, it will keep up to 3 years from the date of manufacture.