


# UNIQ<sup>®</sup> FOAM 158S

*Silicon free polymeric defoamer*

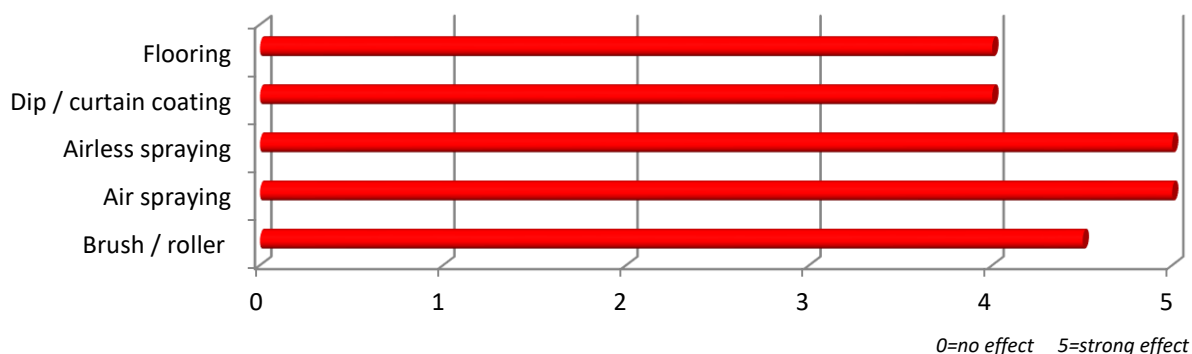

**UNIQ<sup>®</sup> FOAM 158S** is a Silicone free polymeric defoamer suited for solvent-free-, radiation-curing wood- and industrial coatings, printing inks and adhesives. It can be used in pigmented and clear coat systems applicable in every coating layer without effecting the intercoat adhesion and recoatability. Specially suited for epoxy resin, but also very good performances in polyurethane resin types.

**UNIQ<sup>®</sup> FOAM 158S** has strong defoaming efficiency.

## Special Features

- Quick deaeration and defoaming effect
- Silicone free
- No effect on inter coat adhesion and recoatability
- High temperature resistant

## Application

Architectural coatings	<input type="checkbox"/>
Wood and furniture coatings	<input checked="" type="checkbox"/>
Automotive and refinish coatings	<input checked="" type="checkbox"/>
Can/coil coatings	<input checked="" type="checkbox"/>
Anti-corrosive coatings	<input checked="" type="checkbox"/>

Strong recommended ☒  
recommended ☐

## Product Specification

Active ingredient	100 %
Density 20°C	0.83 g/cm <sup>3</sup>
Color	Max. 2
Appearance	Clear colorless liquid

## Addition levels

- Based on total formulation: 0.1 – 1.0 %

Added in grinding stage or under high shear forces incorporation.

## Packaging

- 20 kg
- 160 kg

## Shelf life

**UNIQ<sup>®</sup> FOAM 158S** should be stored in a cool dry place. At low temperature, the product may turn white and can be restored after heating, direct use does not affect its performance. When kept in an original unopened container, it will keep up to 3 years from the date of manufacture.