
# UNIQ®FOAM 182 W



Water based leveling and anti-popping agent

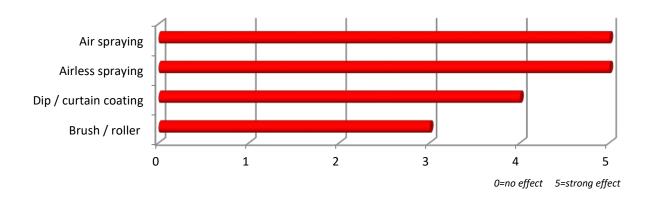

UNIQ® FOAM 182 W is a silicone-free surface additive for aqueous coatings to prevent surface defects such as cratering, scarring, bubbles, pinholes, orange peel and boiling marks and to improve leveling.

#### **Special Features**

- Water based applications
- Improve leveling
- Anti-foam and anti-poping in baking system
- Silicone-free
- Heat stable

#### **Application**

Architectural coatings	
Wood and furniture coatings	
Automotive and refinish coatings	
Can/coil coatings	
Industrial coatings	

highly recommended ■

recommended 🖵

#### **Product Specification**

Active ingredients Density 20 °C **Appearance** 

100% 0.81 g/cm<sup>3</sup> Clear liquid

#### Packaging

- 20 kg
- 150 kg

## **Addition levels**

Based on total formulation: 0.3 - 3.0 %Added in grinding stage or under high shear forces incorporation.

### **Shelf life**

UNIQ®FOAM 182 W should be stored in a cool dry place. When kept in an original unopened container, it will keep up to 2 years from the date of manufacture. At low temperature the product may become turbid, this will not affect the product performances.

UNIQ®FOAM, UNIQ®FLOW, UNIQ®WET, UNIQ®SPERSE, UNIQ®LIGHT, UNIQ®COLOR, UNIQ®MICA, UNIQ®CURE, UNIQ®JET