


# UNIQ<sup>®</sup> FOAM 292 W

Water-based silicone defoamer

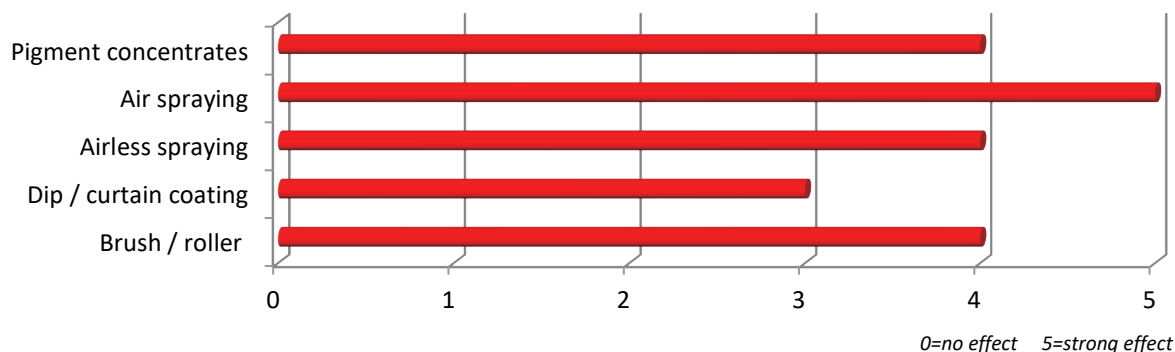

**UNIQ<sup>®</sup> FOAM 292 W** is a strong defoamer based on organic silicone, especially suited for grinding and spraying applications. It is working well against micro-foam and therefore also well suited for self-leveling water-based epoxy flooring systems.

## Special Features

- Water-based and solvent free application
- Strong defoamer for grinding and after grinding
- Excellent defoaming with good compatibility
- Long lasting

## Application

|                                  |   |
|----------------------------------|---|
| Pigment concentrates             | ■ |
| Architectural coatings           | □ |
| Wood and furniture coatings      | ■ |
| Automotive and refinish coatings | □ |
| Can/coil coatings                | □ |
| Protective coatings              | ■ |
| Industrial coatings              | ■ |

highly recommended ■  
recommended □

## Product Specification

Density 20 °C  
Appearance

0.905 g/cm<sup>3</sup>  
Slight yellow liquid

## Addition levels

- Based on total formulation: 0.1 – 1.0 %

## Packaging

- 22 kg
- 170 kg

## Shelf life

**UNIQ<sup>®</sup> FOAM 292 W** should be stored in a cool dry place. When kept in an original unopened container, it will keep up to 2 years from the date of manufacture. At low temperature the product may become turbid, this will not affect the product performances.