


UNIQ® FOAM LP2510

Silicone emulsion defoamer for water based systems

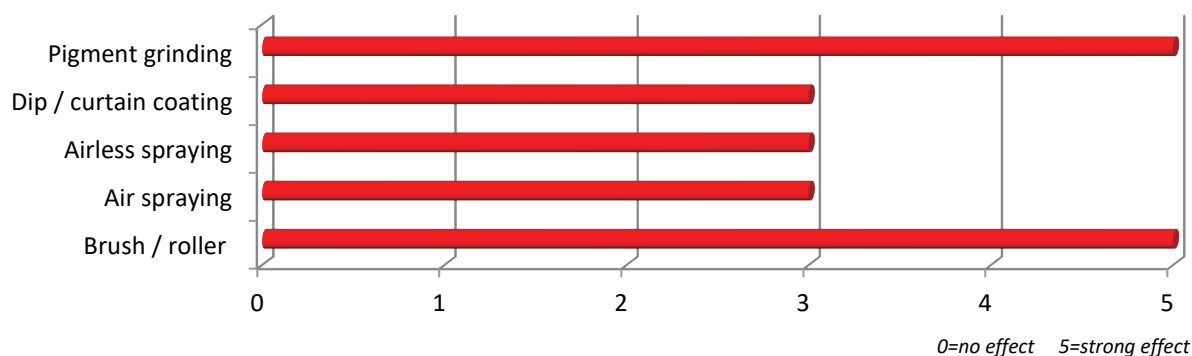

Special Features

- Workable pH range 2.0-12.0
- Good stability
- Good defoaming
- Silicone containing
- Easy to incorporate
- Antifoam and deaeration

Application

- Decorative paints
- Plasters
-

Product Specification

Active content	17%
pH	7.0
Density	1.02 g/ml
Refractive index	
Appearance	white emulsion

Addition levels

- The dosage amount is between 0.1-1.0%.
- Optimum level of defoamer needs to be identified by some experiments.

Packaging

- Can 25 kg
- Drum 200 kg
- IBC 1000 kg

Storage

UNIQ®FLOW LP2510 should be stored in a cool dry place between 5 and 35 °C. When kept in an original unopened container, the shelf life is 2 years from the date of manufacture.