


UNIQ[®] FOAM LP2560

Water based silicone defoamer

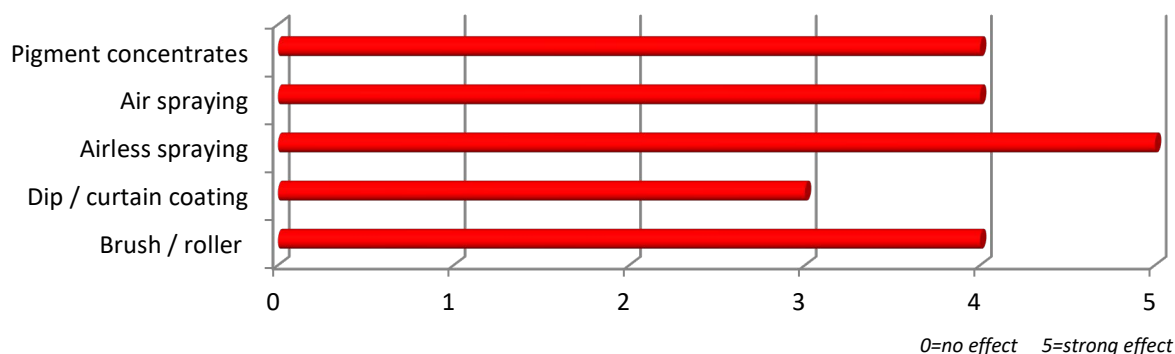

UNIQ[®] FOAM LP2560 is a strong defoamer based on organic silicone, this product can be used for grinding and spraying conditions. Working well against micro-and macrofoam, therefore also well suited for all water-based.

Special Features

- Water based applications
- Strong defoamer for adding in any stage
- Long term persistent
- Silicone based
- Heat stable
- High pH resistance

Application

Architectural coatings	<input type="checkbox"/>
Wood and furniture coatings	<input checked="" type="checkbox"/>
Automotive and refinish coatings	<input type="checkbox"/>
Ink and adhesives	<input checked="" type="checkbox"/>
Pigment concentrates	<input checked="" type="checkbox"/>
Protective coatings	<input checked="" type="checkbox"/>
Industrial coatings	<input checked="" type="checkbox"/>

highly recommended

recommended

Product Specification

Density 20°C
Color
Appearance

0,99 g/cm³
Max. 1
white liquid

Addition levels

- Based on total formulation: 0.1 – 1.0 %

Most of time 0.3% is sufficient. Mix the defoamer well before use.

Packaging

- 25 kg
- 200 kg

Shelf life

UNIQ[®] FOAM LP2560 should be stored in a cool dry place. When kept in an original unopened container, it will keep up to 2 years from the date of manufacture. It is recommended to stir before use to re-homogenize.