


UNIQ[®]FLOW 361 S

Polymeric Fluorocarbon compound leveling agent

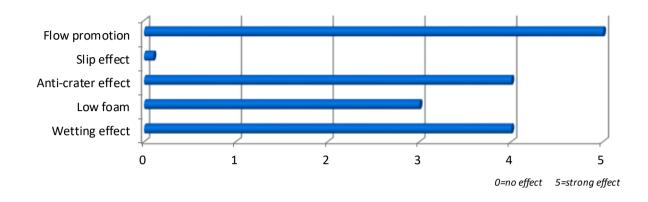

UNIQ[®]**FLOW 361 S** is a silicone free and can offer strong reduction of surface tension, improves wetting effect and has strong anti-crater performances. Meanwhile, it shows the good performance of fast wetting and leveling on difficult corners to achieve good film build up. The products is especially suitable for high performance coatings like automotive and refinish clear coatings. **UNIQ**[®]**FLOW 361 S** the compatibility has been improved to gives excellent clarity in all resins.

Special Features

- Solvent based applications
- Excellent leveling, long wave
- Anti-crater agent
- Excellent substrate wetting
- Silicone free
- Heat stable

Product Specification

Application Architectural coatings Wood and furniture coatings Automotive and refinish coatings Can/coil coatings Protective coatings Industrial coatings

■ highly recommended
recommended

Addition levels

• Based on total formulation: 0.05 – 0.5 %

Active ingredients	100 %
Density 20 °C	1.08 g/cm ³
Color	Max. 4
Appearance	Clear colorless liquid

Packaging

- 25 kg
- 200 kg

Shelf life

UNIQ[®]**FLOW 361 S** should be stored in a cool dry place. When kept in an original unopened container, it will keep up to 5 years from the date of manufacture.



www.uniqchem.com Info@uniqchem.com

Regional headquarters

 UNIQ®FOAM, UNIQ®FLOW, UNIQ®W ET, UNIQ®SPERSE, UNIQ®LIGHT, UNIQ®COLOR, UNIQ®MICA, UNIQ®CURE, UNIQ®JET

 This information is given to the best of our knowledge. Because of the multitude of formulations, production and application conditions, all the above mentioned statements have to be adjusted to the circumstances of the processor. No liabilities, including those for pattent rights, can be derived from this fact for individual cases.

 This datasheets replaces all previous issues – Printed in UK

 © Copyright UNIQCHEM (UK) CO., LTD.

 Asia:
 UNIQCHEM Shanghai Co., Ltd.

 Tel: +49 5921 853 7428

 eu@unigchem.com