
UNIQ®FLOW 372 S



Fluorocarbon modified polyacrylate leveling agent for solvent and water based system

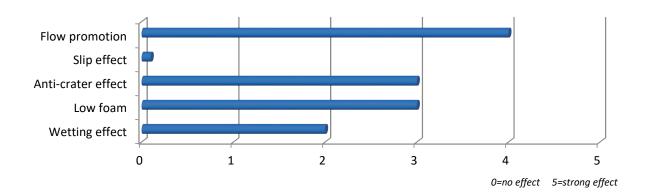

UNIQ®FLOW 372 S is a silicone free fluor modified acrylic leveling agent to be used in solvent- and water-based coating systems. Especially in water based systems the product shows good defoaming performances. For water based systems it is advisable to adjust the pH to 8 – 8.5 to make the product fully water soluble.

Special Features

- Solvent and water based applications
- Excellent leveling, long wave-effect
- Prevents crater
- Helps substrate wetting
- Act as a defoamer and de-aeration aid
- Suitable for high gloss coating
- Heat stable

Application

Architectural coatings	
Wood and furniture coatings	
Automotive and refinish coatings	
Can/coil coatings	
Protective coatings	
Industrial coatings	

highly recommended ■

recommended 🗖

Product Specification

Active ingredients Density 20 °C Solvent Color **Appearance**

60 % 0.96 g/cm³ 2-butyl alcohol Max. 1 Clear colorless liquid

Addition levels

Based on total formulation: 0.1 - 1.0 %

Packaging

- 25 kg
- 190 kg

Shelf life

UNIQ®FLOW 372 S should be stored in a cool dry place. When kept in an original unopened container, it will keep up to 5 years from the date of manufacture.

UNIQ®FOAM, UNIQ®FLOW, UNIQ®WET, UNIQ®SPERSE, UNIQ®LIGHT, UNIQ®COLOR, UNIQ®MICA, UNIQ®CURE, UNIQ®JET

This information is given to the best of our knowledge. Because of the multitude of formulations, production and application conditions, all the above mentioned statements have to be adjusted to the circumstances of the processor.