


UNIQ[®]FLOW 380 S

Polyacrylate based surface additive with air-release properties

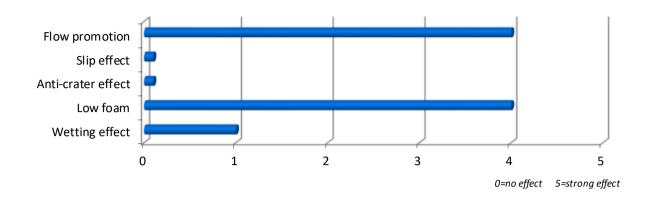

UNIQ[®] FLOW 380 S is a cost effective acrylic leveling agent for solvent based coating systems showing good defoaming performances.

Special Features

- Solvent borne applications
- Improve levelling •
- Acts as a defoamer and de-aeration aid
- Does not interfere intercoat adhesion •
- Silicone free
- Heat stable

Application

Architectural coatings	
Wood and furniture coatings	
Automotive and refinish coatings	
Can/coil coatings	
Protective coatings	
Industrial coatings	

Based on total formulation:

highly recommended recommended

0.1 - 1.0%

Product Specification

Active ingredients Density 20 °C Color Appearance

100 % 1.0 g/cm³ Max. 1 Clear colorless liquid

Packaging

- 25 kg
- 190 kg

Shelf life

Addition levels

UNIQ[®]FLOW 380 S should be stored in a cool dry place. When kept in an original unopened container, it will keep up to 5 years from the date of manufacture.

UNIQCHEM (UK) CO., LTD

www.uniqchem.com Info@uniqchem.com

Regional headquarters

UNIQ®FOAM, UNIQ®FLOW, UNIQ®WET, UNIQ®SPERSE, UNIQ®LIGHT, UNIQ®COLOR, UNIQ®MICA, UNIQ®CURE, UNIQ®JET This information is given to the best of our knowledge. Because of the multitude of formulations, production and application conditions, all the above mentioned statements have to be adjusted to the circumstances of the processor. No liabilities, including those for patent rights, can be derived from this fact for individual cases. © Copyright UNIQCHEM (UK) CO., LTD. Asia: UNIQCHEM Shanghai Co., Ltd. Tel: Tel: +86 21 5433 6480 asia@uniqchem.com EMEA:

UNIQCHEM GmbH

Tel: +49 5921 853 7428

eu@uniqchem.com