


UNIQ®FLOW 498 U

Polyether modified silicone leveling agent

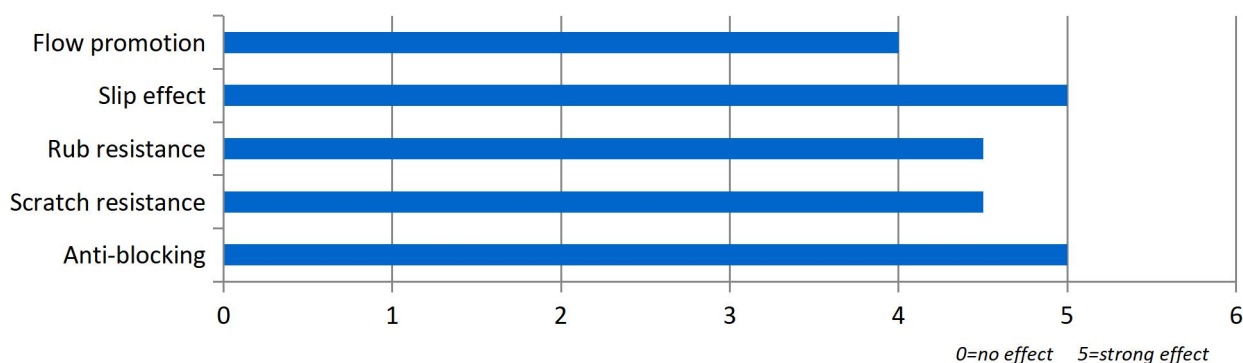

UNIQ®FLOW 498 U is polyether modified silicone leveling agent. It is suitable for solvent-free, solvent based and water-based coatings. **UNIQ®FLOW 498 U** has the ability to moderately reduce surface tension and moderately improve smoothness.

Special Features

- Suitable for multi-binder system both water base and solvent base
- Improve smoothness
- Improve leveling and gloss
- Good substrate wetting
- Nice anti-blocking
- Prevent the formation of Bernard vortex

Application

Architectural coatings	■
Wood and furniture coatings	■
Automotive and refinish coatings	■
Can/coil coatings	□
Protective coatings	□
Industrial coatings	■

highly recommended ■
recommended □

Product Specification

Active ingredients	100 %
Density 20°C	1.04 g/cm ³
Appearance	Yellowish liquid

Addition levels

- Based on total formulation: 0.02 – 0.3 %

Packaging

- 25 kg

Shelf life

UNIQ®FLOW 498 U should be stored in a cool (below 25 °C) dry place. When kept in an original unopened container, it will keep up to 5 years from the date of manufacture.