


UNIQ[®] FLOW 498U

Organically modified polysiloxane

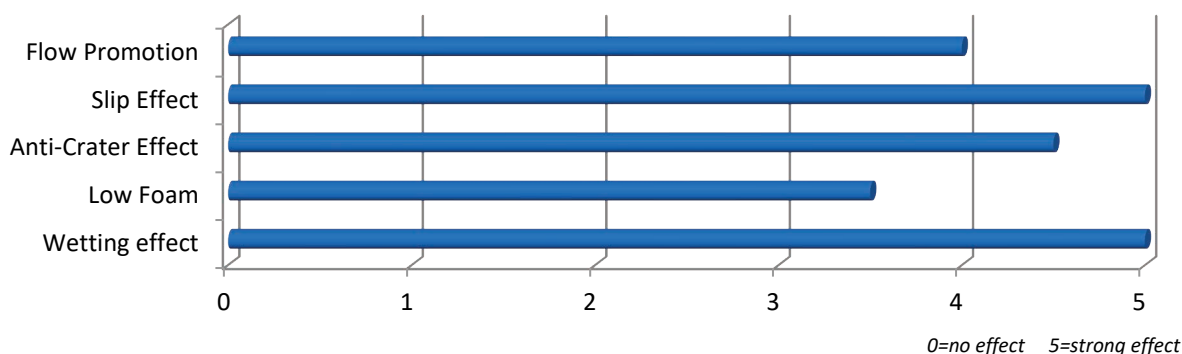

UNIQ[®] FLOW 498U is polysiloxane wetting and leveling agent suitable for solvent based, solvent free and water based systems. It increases slip, improves leveling and gloss, prevents the formation of Bernard cells, improves substrate wetting and provides anti-blocking properties.

Special Features

- Suited for solvent based, solvent free and water based system
- Excellent substrate wetting
- Improve slip
- Improve leveling and gloss
- Excellent anti-blocking

Application

Wood coating	■
Automotive and refinish coating	■
Can/coil coating	□
Protective coating	□
Industrial coating	■

Highly recommended ■
recommended □

Product Specification

Active ingredients	100%
Density 20°C	1.04 g/cm ³
Color	Max. 4
Appearance	slight yellowish liquid

Addition levels

- Based on total formulation 0.02–0.3%

Packaging

- 25 kg
- 190 kg

Shelf life

UNIQ[®] FLOW 498U Should be stored in cool dry place. When kept in an original unopened container, it will keep up to 5years from the date of manufacture.