
# UNIQ®FLOW 499 U



Silicone surface additive

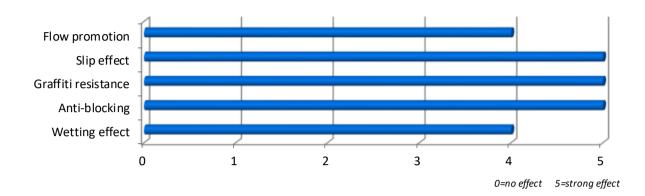

UNIQ FLOW 499 U is silicone surface additive. The additive can give excellent graffiti resistance of coatings after crosslinking because of the -OH group in it. UNIQ FLOW 499 U gives strong surface slip and excellent hand feelings. At the same time, it improves the anti-blocking properties.

# **Special Features**

- Suited for 2KPU and baking system
- Silicone surface additive
- Excellent graffiti resistance of coatings
- Improve the wetting abilities on the substrate
- Improve slip and give excellent hand feelings

# **Application**

Architectural coatings	
Wood and furniture coatings	
Automotive and refinish coatings	
Can/coil coatings	
Protective coatings	
Industrial coatings	

highly recommended ■

recommended 🗖

### **Product Specification**

Active ingredients Density 20°C Color Appearance

100 % 0.98 g/cm3 Max.1 Clear colorless liquid

#### **Addition levels**

Based on total formulation: 0.5 - 2.0%

## **Packaging**

- 25 kg
- 180 kg

# Shelf life

UNIQ®FLOW 499 U should be stored in a cool dry place. When kept in an original unopened container, it will keep up to 3 years from the date of manufacture.

UNIQ®FOAM, UNIQ®FLOW, UNIQ®WET, UNIQ®SPERSE, UNIQ®LIGHT, UNIQ®COLOR, UNIQ®MICA, UNIQ®CURE, UNIQ®JET