


# UNIQ® FLOW P-304

Polyacrylate based surface additive with air-release properties

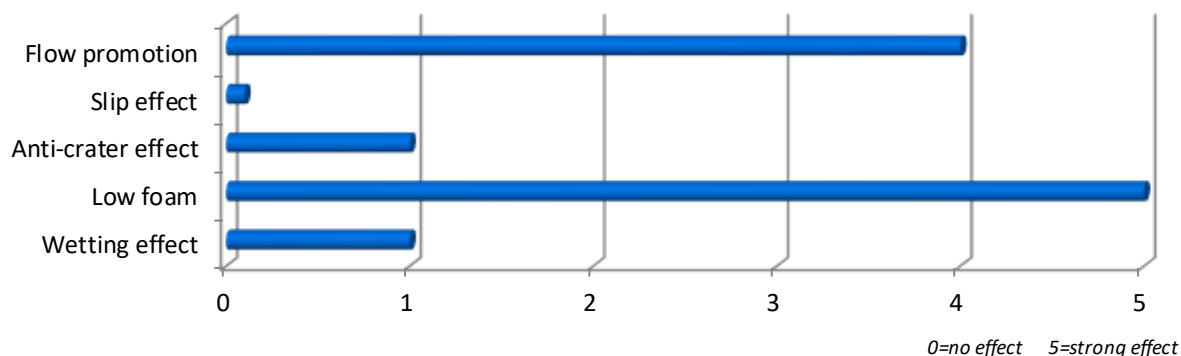

**UNIQ® FLOW P-304** is a cost effective acrylic leveling agent for solvent based and solvent free systems. It's very suitable for gel coats that are base on unsaturated polyesters, epoxides and polyurethanes. The product shows excellent defoaming and leveling performances. It is non-silicone and therefore will not cause intercoat adhesion problems.

The additive is preferably used in combination with air release agent like **UNIQ® FOAM P-555**.

## Special Features

- Solvent borne and solvent free applications
- Improves levelling
- Acts as a defoamer and de-aeration aid
- Does not interfere intercoat adhesion
- Silicone free
- Heat stable

## Application

Ambient curing system	
UPE	■
Epoxy	■
PU	■
Gel coats	
UPE	■
Epoxy	■
PU	■

highly recommended ■  
recommended □

## Product Specification

Solid content	100 %
Density	1.00 g/cm <sup>3</sup>
Color	Max. 1
Appearance	Transparent viscous liquid

## Addition levels

- Based on total formulation: 0.1 – 1.0%

The above recommended levels can be used for orientation and needs to be optimized by testing.

## Packaging

- 25 kg

## Storage

**UNIQ® FLOW P-304** should be stored in a cool dry place. When kept in an original unopened container, it will keep up to 5 years from the date of manufacture.