


UNIQ[®] FOAM 132 S

Silicone free defoamer

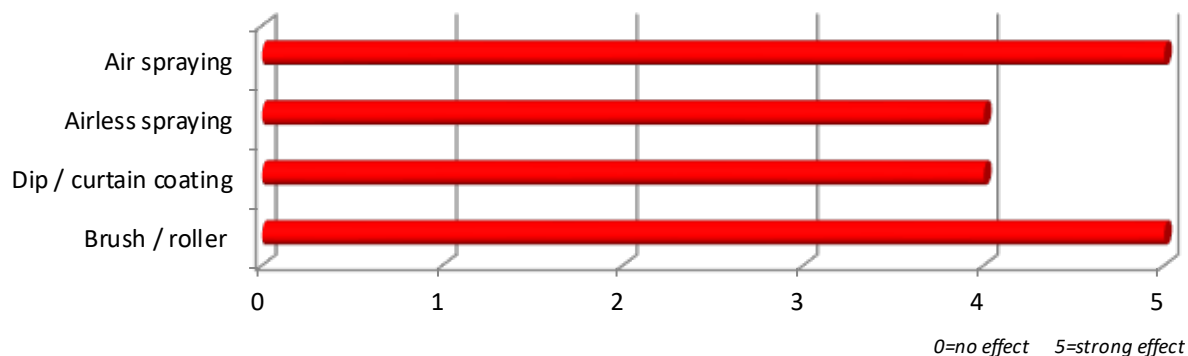

UNIQ[®] FOAM 132 S is medium to strong defoamer to be used in clear coatings as well suitable for pigmented coating systems. Due the chemical structure the product will not cause turbidity, but will give good air-release and macro defoaming properties. Also very well suited for PE primers remaining high clarity and transparency. The product is well suited for spraying applications.

Special Features

- Strong defoamer
- Suitable for clear coats and pigmented coatings systems
- Does not interfere intercoat adhesion
- Silicone-free
- Heat stable

Application

PE primers	■
Polyurethane systems	■
NC systems	■
Baking systems	■

highly recommended ■

recommended □

Product Specification

Density 20°C
Color
Appearance

0.98 g/cm³
Max. 1
Yellowish clear liquid

Addition levels

- Based on total formulation: 0.1 – 1.0%

Packaging

- 25 kg
- 180 kg

Shelf life

UNIQ[®] FOAM 132 S should be stored in a cool dry place. When kept in an original unopened container, it will keep up to 5 years from the date of manufacture.