


UNIQ[®] FOAM 175 S

Solution of non-silicone defoaming polymers

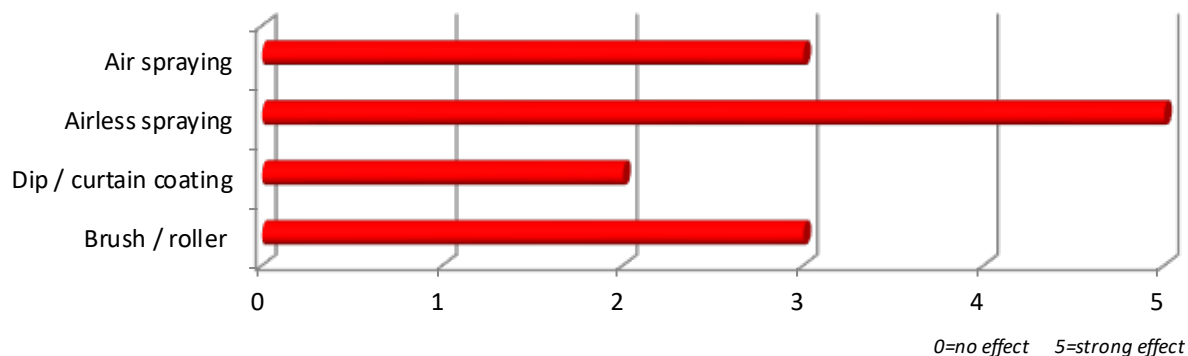

UNIQ[®] FOAM 175 S is especially effective in wood and furniture coatings based on glossy polyester, paraffin polyester, and in radiation curable polyester. The additive allows curtain coaters to maintain curtain stability even when only thin layers are applied. When using non-pigmented systems, a slight turbidity may be visible over dark wood. Good results were also found with epoxy systems.

Special Features

- Solvent borne and solvent free applications
- Suited for UV coating
- Anti-foam and deaeration additive
- Does not interfere intercoat adhesion
- Silicone-free
- Heat stable

Application

Architectural coatings	<input type="checkbox"/>
Wood and furniture coatings	<input checked="" type="checkbox"/>
Automotive and refinish coatings	<input checked="" type="checkbox"/>
Can/coil coatings	<input type="checkbox"/>
Industrial coatings	<input type="checkbox"/>

highly recommended
recommended

Product Specification

Density 20°C
Color
Appearance

0.88 g/cm³
Max. 1
Slight yellowish clear liquid

Addition levels

- Based on total formulation: 0.1 – 1.0%

Due to its slight incompatibility, the influence upon the transparency of clear systems or other surface defects must be evaluated.

Packaging

- 25 kg
- 170 kg

Shelf life

UNIQ[®] FOAM 175 S should be stored in a cool dry place. When kept in an original unopened container, it will keep up to 5 years from the date of manufacture. At low temperature the product may become turbid, this will not affect the product performances.