


# UNIQ<sup>®</sup> FOAM 235 S

Silicone defoamer with modification of fluorocarbon

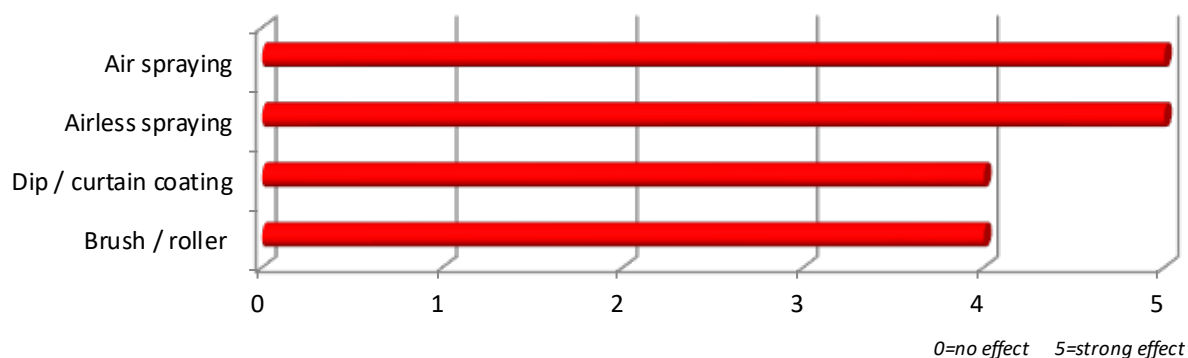

**UNIQ<sup>®</sup> FOAM 235 S** is recommended for roller, brush and conventional spray application, very suitable also for systems ranging from low polar to high polar with strong working in against micro-foam. The defoamer is highly effective for solvent based and solvent free coating systems, which offers optimal defoaming at a very low percentage.

## Special Features

- suited for medium viscosity for spray, brush and roller application
- Well suited for curtain coating applications
- micro foam destroying properties
- rather good compatibility

## Application

Architectural coatings	■
Wood and furniture coatings	■
Automotive and refinish coatings	■
Can/coil coatings	□
Protective coatings	■
Industrial coatings	■

highly recommended ■  
recommended □

## Product Specification

Density 20 °C	0.81 g/cm <sup>3</sup>
Refractive index	1.415
Color	Max 1
Appearance	Clear colorless liquid

## Addition levels

- Based on total formulation: 0.1 – 0.6 %  
Added before grinding.

## Packaging

- 22 kg
- 150 kg

## Shelf life

**UNIQ<sup>®</sup> FOAM 235 S** should be stored in a cool dry place. When kept in an original unopened container, it will keep up to 5 years from the date of manufacture. At low temperature the product may become turbid, this will not affect the product performances.