


UNIQ[®]FOAM P-555

Solution of silicone free defoaming polymers

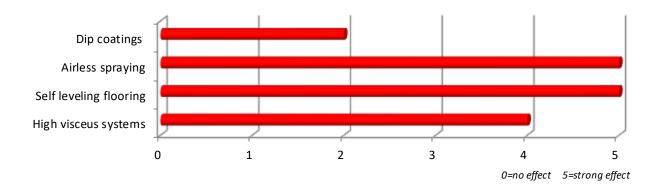

UNID[®]**FOAM P-555** is a strong anti-foam and air-release agent especially suitable for ambient-curing plastic systems, adhesives and sealants. Especially suitable for unsaturated polyesters.

Special Features

- Quick de-aeration and defoaming effect
- Foam reduction during manufacturing
- Suitable for pigment loading coating systems
- Silicone-free
- Heat stable

Application

Pultrusion of plastic systems	
UPE	-
Acrylates	•
Vinyl esters	
Ambient curing plastic	

highly recommended ■ recommended □

Product Specification

Density 20°C Color Appearance 0.917 g/cm³ Max.1 Slighthazy colorless liquid

Addition levels

• Based on total formulation: 0.1 - 1.0%Added in grinding stage or under high shear forces incorporation. Ensure good distribution to avoid craters.

Packaging

22 kg

Shelf life

LNIQ[®]**FOAM P-555** should be stored in a cool dry place. When kept in an original unopened container, it will keep up to 5 years from the date of manufacture.



www.unigchem.com

Regional headquarters

 This information is given to the best of our knowledge. Because of the multitude of formulations, production and application conditions, all the above mentioned statements have to be adjusted to the circumstances of the processor. No liabilities, including those for patent rights, can be derived from this fact for individual cases. This datasheets replaces all previous issues – Printed in UK

 © Copyright UNIQCHEM (UK) CO., LTD.
 Asia:
 UNIQCHEM Shanghai Co., Ltd.
 Tel: +86 21 5433 6480
 asia@uniqchem.com

 EMEA:
 UNIQCHEM GmbH
 Tel: +49 5921 853 7428
 asia@uniqchem.com

UNIQ®FOAM, UNIQ®FLOW, UNIQ®W ET, UNIQ®SPERSE, UNIQ®LIGHT, UNIQ®COLOR, UNIQ®MICA, UNIQ®CURE, UNIQ®JET