


UNIQ® SPERSE P-195

Wetting and dispersing additive

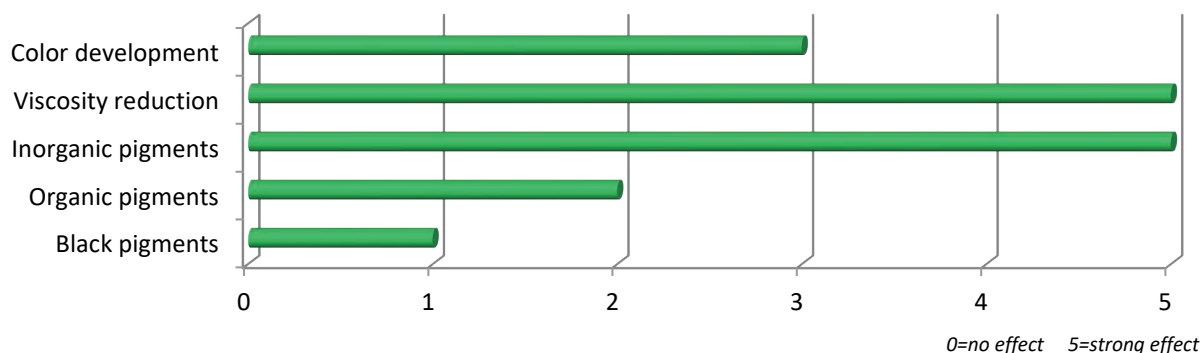

UNIQ® SPERSE P-195 is a wetting and dispersing additive for filled unsaturated polyester, PVC plastisols and thermoplastics applications. The dispersant is especially suitable for inorganic pigments and filler pigments. Strong viscosities reduction so higher pigment and filler loading in the grinding process can be achieved.

Special Features

- Wetting and dispersing agent for TiO₂, inorganic pigments and fillers
- Reduce the viscosity
- Increase the pigment and filler loading

Application

Low emission SMC/BMC X	■
LP and Class A formulations X	■
LS formulations X	■
Pultrusion X	■
Viscosity stabilizer	■

highly recommended ■

recommended □

Product Specification

Active ingredients	100%
Density 20°C	1.21 g/cm ³
Acid value	230 mg KOH/g
Appearance	Slight yellowish clear liquid

Addition levels

Amount of solid additive based on pigment (SOP):

- Fillers: 0.5 - 1%
- Titanium dioxides: 1 - 2%

The above recommended levels can be used for orientation and needs to be optimized by testing.

Packaging

- 25 kg
- 200 kg

Shelf life

UNIQ® SPERSE P-195 should be stored in a cool dry place. When kept in an original unopened container, it will keep up to 5 years from the date of manufacture.