


# UNIQ<sup>®</sup> FLOW 375 S

Fluorocarbon modified polyacrylate leveling agent for solvent based system

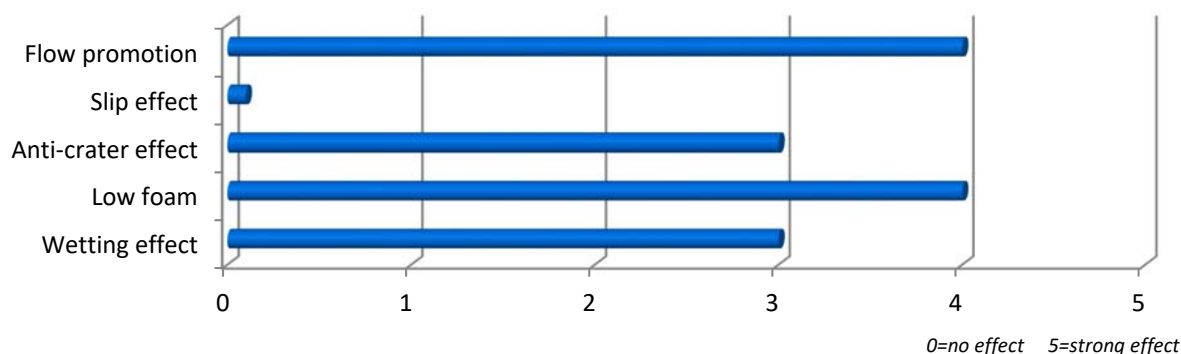

**UNIQ<sup>®</sup> FLOW 375 S** is a fluor modified acrylic leveling agent to be used in solvent based coating systems showing some defoaming performances. Due to the composition the compatibility needs to be checked for haze. For improved compatibility **UNIQ<sup>®</sup> FLOW 376 S** or **UNIQ<sup>®</sup> FLOW 378 S** is recommended.

## Special Features

- Solvent borne applications
- Excellent leveling, long wave-effect
- Prevents cratering
- Helps substrate wetting
- Acts as a defoamer and de-aeration aid
- Does not interfere intercoat adhesion
- Silicone-free
- Heat stable

## Application

Architectural coatings	■
Wood and furniture coatings	■
Automotive and refinish coatings	■
Can/coil coatings	■
Protective coatings	■
Industrial coatings	■

highly recommended ■  
recommended □

## Product Specification

Active ingredients	70 %
Density 20°C	0.99 g/cm <sup>3</sup>
Solvent	Xylene
Color	Max. 1
Appearance	Clear colorless liquid

## Addition levels

- Based on total formulation: 0.1 – 1.0 %

## Packaging

- 25 kg
- 190 kg

## Shelf life

**UNIQ<sup>®</sup> FLOW 375 S** should be stored in a cool dry place. When kept in an original unopened container, it will keep up to 5 years from the date of manufacture.