
UNIQ®FLOW 376 S



Fluorocarbon modified polyacrylate leveling agent for solvent based system

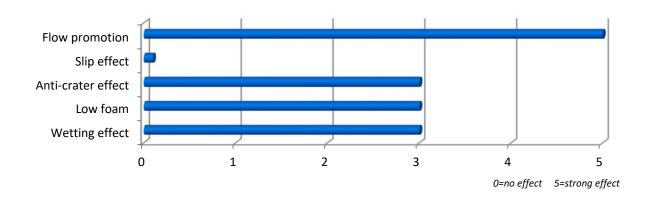

UNIQ®FLOW 376 S is a fluor modified acrylic leveling agent to be used in solvent based coating systems showing excellent compatibility with most of the resins. Can be used also in UPE primers for wood coatings remaining excellent clarity. Gives very fast leveling and with perfect appearances for clear coats.

Special Features

- Suitable for high gloss clear coating
- Excellent leveling, long wave-effect
- Prevents cratering
- Helps substrate wetting
- Acts as a defoamer and de-aeration aid
- Silicone-free
- Heat stable

Application

Architectural coatings	
Wood and furniture coatings	
Automotive and refinish coatings	
Can/coil coatings	
Protective coatings	
Industrial coatings	

highly recommended ■

recommended 🗖

Product Specification

Active ingredients Density 20 °C Solvent Color **Appearance**

70 % 1.02 g/cm³ **PMA** Max. 1 Clear colorless liquid

EMEA:

Addition levels

Based on total formulation: 0.1 - 1.0 %

Packaging

- 25 kg
- 190 kg

Shelf life

UNIQ®FLOW 376 S should be stored in a cool dry place. When kept in an original unopened container, it will keep up to 5 years from the date of manufacture.

UNIOCHEM GmbH Tel: +49 5921 853 7428

UNIQ®FOAM, UNIQ®FLOW, UNIQ®WET, UNIQ®SPERSE, UNIQ®LIGHT, UNIQ®COLOR, UNIQ®MICA, UNIQ®CURE, UNIQ®JET

Tel: +86 21 5433 6480 asia@uniqchem.com