


# UNIQ<sup>®</sup> FLOW 383 S

Modified polyester leveling agent

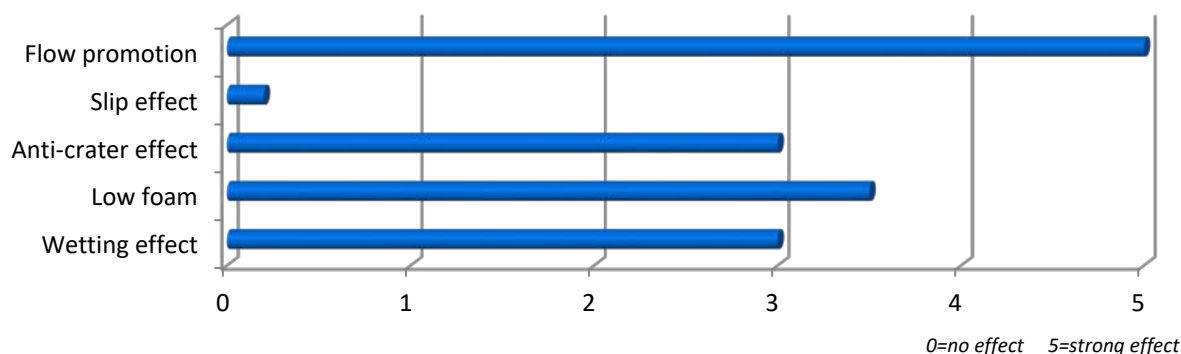

**UNIQ<sup>®</sup> FLOW 383 S** is modified polyester leveling agents to be used in solvent based coating system. Shows excellent compatibility with most of the resins. It shows the good fast wetting and leveling and strong defoaming performances, It will improve DOI and fullness. it shows good performance in automotive and industrial coating

## Special Features

- Solvent base application
- Excellent flow and leveling
- No intercoat adhesion problem
- Good anti-crater
- Good substrate wetting
- Wide compatibility
- Silicone free
- Heat stable

## Application

Architectural coatings	<input type="checkbox"/>
Wood and furniture coatings	<input type="checkbox"/>
Automotive and refinish coatings	<input checked="" type="checkbox"/>
Can/coil coatings	<input checked="" type="checkbox"/>
Protective coatings	<input checked="" type="checkbox"/>
Industrial coatings	<input checked="" type="checkbox"/>

highly recommended   
recommended

## Product Specification

Active ingredients	100 %
Density 20 °C	1.12 g/cm <sup>3</sup>
Color	Max. 2
Appearance	Clear colorless to slight yellowish liquid

## Addition levels

- Based on total formulation: 0.1 – 1 %

## Packaging

- 25 kg
- 200 kg

## Shelf life

**UNIQ<sup>®</sup> FLOW 383 S** should be stored in a cool dry place. When kept in an original unopened container, it will keep up to 5 years from the date of manufacture.