


UNIQ[®] FLOW 384 S

Polyacrylate based surface additive with air-release properties

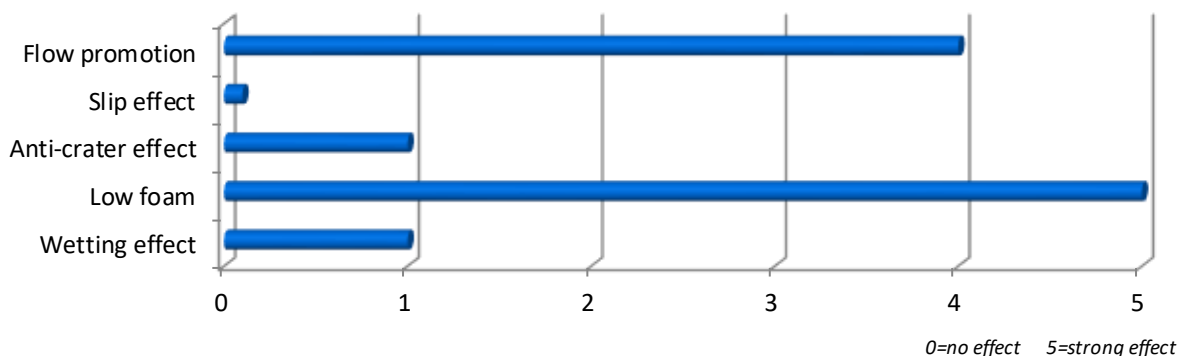

UNIQ[®] FLOW 384 S is a cost effective acrylic leveling agent for solvent based and solvent free coating systems showing excellent defoaming and leveling performances. It is non-silicone and therefore will not cause intercoat adhesion problems. It is heat stable and therefore suitable for the baking system. The compatibility needs to be checked, especially in clear coats.

Special Features

- Solvent borne and solvent free applications
- Improves levelling
- Acts as a defoamer and de-aeration aid
- Does not interfere intercoat adhesion
- Silicone free
- Heat stable

Application

Architectural coatings	
Wood and furniture coatings	■
Automotive and refinish coatings	■
Can/coil coatings	■
Protective coatings	■

highly recommended ■
recommended □

Product Specification

Active ingredients	100 %
Density	1.00 g/cm ³
Color	Max. 1
Appearance	Clear colorless liquid

Addition levels

- Based on total formulation: 0.1 – 1.0 %

Check compatibility especially in clear coats.

Packaging

- 25 kg
- 190 kg

Storage

UNIQ[®] FLOW 384 S should be stored in a cool dry place. When kept in an original unopened container, it will keep up to 5 years from the date of manufacture.