


UNIQ[®] FLOW 392 S

Acrylate leveling agent with anti-popping properties

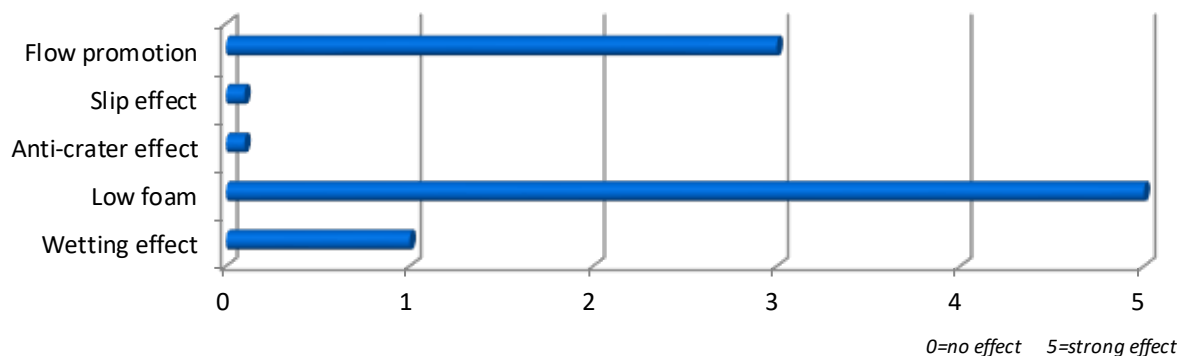

UNIQ[®] FLOW 392 S is a polyacrylate surface active agent for solvent based applications especially suitable for baking systems. It promotes leveling, has defoaming effect (particularly for micro foam), and is effective for very short baking times. Suitable for roller application, conventional spraying application, and airless/airmix applications.

Special Features

- Anti-popping in solvent borne baking applications
- Improve leveling
- Excellent defoaming and degassing properties
- Does not interfere intercoat adhesion
- Silicone free
- Suitable for roller-, spraying- and airless/airmix applications

Application

Architectural coatings	■
Wood and furniture coatings	■
Automotive and refinish coatings	■
Can/coil coatings	■
Protective coatings	■
Industrial coatings	■

highly recommended ■
recommended □

Product Specification

Active ingredients	50 %
Solvent	PMA
Density 20 °C	1.0 g/cm ³
Color	Max. 1
Appearance	Clear colorless liquid

Addition levels

- Based on total formulation: 0.1 – 1.0 %

Packaging

- 25 kg
- 190 kg

Shelf life

UNIQ[®] FLOW 392 S should be stored in a cool dry place. When kept in an original unopened container, it will keep up to 5 years from the date of manufacture.