


UNIQ[®] FLOW 400 U

Organically modified polysiloxane

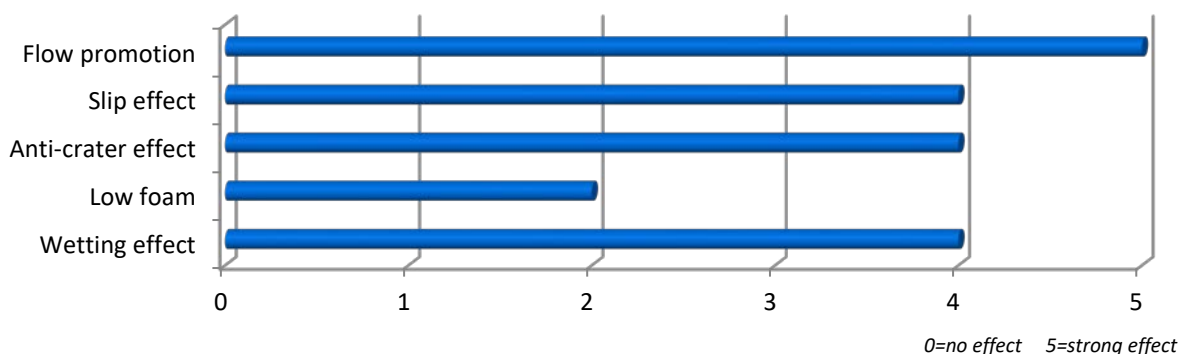

UNIQ[®] FLOW 400 U is silicone surface additive for solvent- and water based coating systems with a medium reduction of surface tension and a medium increase of surface slip. **UNIQ[®] FLOW 400 U** increases slip and improves leveling, gloss and prevent the formation of Bénard cells. It also improves substrate wetting and anti-blocking properties.

Special Features

- Suitable for solvent and water borne
- Improve slip and hand feeling
- Improve substrate wetting
- Low foam
- improves scratch resistance
- minimal influence on intercoat adhesion

Application

Architectural coatings	■
Wood and furniture coatings	■
Automotive and refinish coatings	■
Can/coil coatings	□
Protective coatings	■
Industrial coatings	■

highly recommended ■
recommended □

Product Specification

Active ingredients	50 %
Density 20°C	0.91 g/cm ³
Solvent	Isobutanol
Color	Max. 1
Appearance	Clear colorless liquid

Addition levels

- Based on total formulation: 0.1 – 0.5 %

Packaging

- 25 kg
- 180 kg

Shelf life

UNIQ[®] FLOW 400 U should be stored in a cool dry place. When kept in an original unopened container, it will keep up to 2 years from the date of manufacture. At low temperature the product may become turbid, this will not affect the product performances.