


# UNIQ<sup>®</sup> FLOW 437 S

Blend of high-boiling aromatic, ketone and ester solvents, including a highly compatible polysiloxane

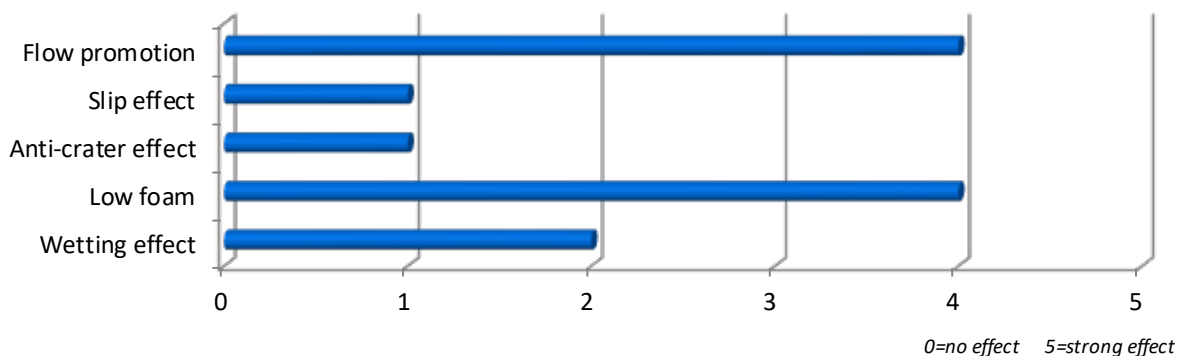

**UNIQ<sup>®</sup> FLOW 437 S** prevents surface irregularities like craters, scars, blisters, pinholes and orange peel. It suppresses the risk of solvent popping and improves leveling. It is recommended for use in solvent-borne, air-drying coatings and baking systems.

## Special Features

- Excellent compatibility
- Prevents surface defects like cratering, scarring or blistering in air drying and stoving paints
- Prevents streaking during painting and spraying of chlorinated rubber and coatings based on other chlorinated polymers
- Prevents popping in stoving enamels
- improve leveling
- no recoat problem

## Application

Architectural coatings	■
Wood and furniture coatings	■
Automotive and refinish coatings	■
Can/coil coatings	□
Protective coatings	■
Industrial coatings	■

highly recommended ■  
recommended □

## Product Specification

Solvent	Hydrocarbons C9 aromatics/DIBK
Density 20 °C	0.86 g/cm <sup>3</sup>
Flash point	42 °C
Appearance	Colorless liquid

## Addition levels

- Based on total formulation: 1.0 – 5.0 %

## Packaging

- 25 kg
- 170 kg

## Shelf life

**UNIQ<sup>®</sup> FLOW 437 S** should be stored in a cool dry place. When kept in an original unopened container, it will keep up to 5 years from the date of manufacture. At low temperature the product may become turbid, this will not affect the product performances.