


UNIQ[®] FLOW 440 U

Organically modified polysiloxane

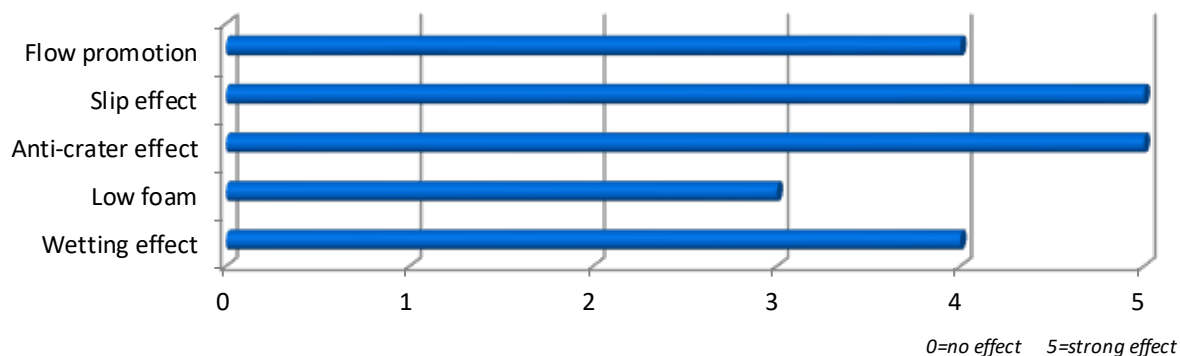

UNIQ[®] FLOW 440 U is modified polyether polysiloxane leveling agents. The product can offer strong reduction of surface tension and improves wetting effect and anti-crater effect of substrate. Meanwhile, it shows the good performance of fast leveling.

Special Features

- Suitable for solvent and water borne
- Anti-crater agent
- Good substrate wetting
- Low foam
- Improve anti floating and flooding
- minimal influence on intercoat adhesion

Application

Architectural coatings	■
Wood and furniture coatings	■
Automotive and refinish coatings	■
Can/coil coatings	
Protective coatings	■
Industrial coatings	■

highly recommended ■
recommended □

Product Specification

Active ingredients	50 %
Density 20 °C	0.98 g/cm ³
Solvent	PM
Appearance	Clear colorless liquid

Addition levels

- Based on total formulation: 0.1 – 0.3 %

Packaging

- 25 kg
- 190 kg

Shelf life

UNIQ[®] FLOW 440 U should be stored in a cool dry place. When kept in an original unopened container, it will keep up to 2 years from the date of manufacture. At low temperature the product may become turbid, this will not affect the product performances.