


UNIQ[®] FLOW 486 U

Organically modified polysiloxane

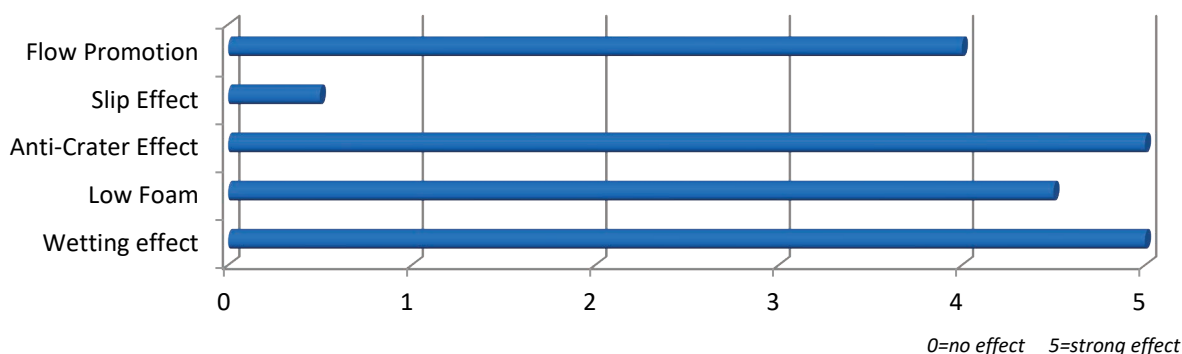

UNIQ[®] FLOW 486 U is polysiloxane wetting and leveling agent is mainly used in water-based applications, but also suited to be used in solvent-based and solvent-free applications like in UV. The additive give excellent substrate wetting combined with low foam stabilization. It has excellent anti-crater working and is preventing edging. The product can be used in every paint layer without effecting the intercoat adhesion.

Special Features

- Excellent substrate wetting
- Excellent anti-crater
- No influence on intercoat adhesion
- Low foam stabilization
- Effectively prevent edging

Application

Wood coating	■
Automotive and refinish coating	■
Can/coil coating	■
Protective coating	■
Industrial coating	■

Highly recommended ■
recommended □

Product Specification

Active ingredients	100%
Density 20°C	1.05 g/cm ³
Color	Max. 13
Appearance	brownish liquid

Addition levels

- Based on total formulation 0.1– 1 %

Packaging

- 25 kg
- 190 kg

Shelf life

UNIQ[®] FLOW 486 U Should be stored in cool dry place. When kept in an original unopened container, it will keep up to 5years from the date of manufacture.