


UNIQ[®] FLOW 489 U

Organically modified polysiloxane

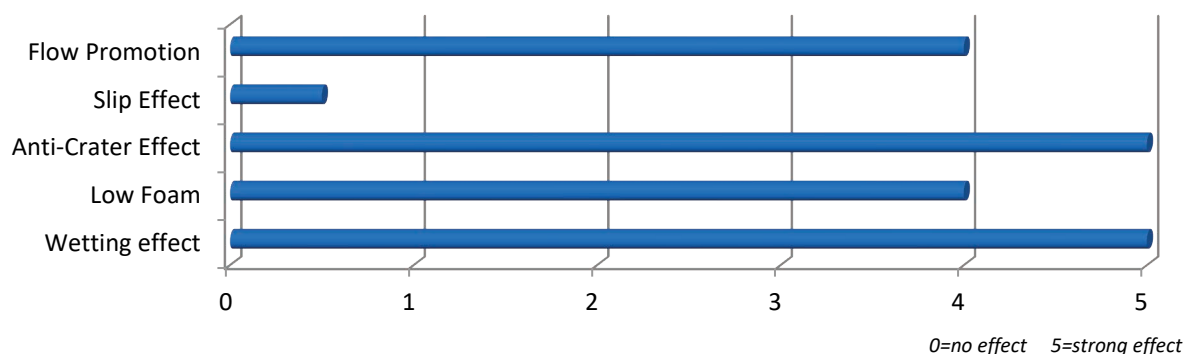

UNIQ[®] FLOW 489 U is polysiloxane wetting and leveling agent is mainly used in water-based applications, but also suited to be used in solvent-based and solvent-free applications like in UV. The additive give excellent substrate wetting combined with low foam stabilization. It has excellent anti-crater working and is preventing edging. The product can be used in every paint layer without effecting the intercoat adhesion.

Special Features

- Excellent substrate wetting
- Excellent anti-crater
- No influence on intercoat adhesion
- Low foam stabilization
- Effectively prevent edging

Application

Architectural coating	<input type="checkbox"/>
Wood coating	<input checked="" type="checkbox"/>
Automotive and refinish coating	<input checked="" type="checkbox"/>
Can/coil coating	<input checked="" type="checkbox"/>
Protective coating	<input checked="" type="checkbox"/>
Industrial coating	<input checked="" type="checkbox"/>

Highly recommended
recommended

Product Specification

Active ingredients	100%
Density 20°C	1.06 g/cm ³
Color	Max. 7
Appearance	slight brownish hazy liquid

Addition levels

- Based on total formulation 0.1– 1 %

Packaging

- 25 kg
- 190 kg

Shelf life

UNIQ[®] FLOW 489 U Should be stored in cool dry place. When kept in an original unopened container, it will keep up to 5 years from the date of manufacture.

UNIQCHEM SHANGHAI CO., LTD

www.uniqchem.com
Info@uniqchem.com

Regional headquarters

UNIQ[®]FOAM, UNIQ[®]FLOW, UNIQ[®]WET, UNIQ[®]SPERSE, UNIQ[®]LIGHT, UNIQ[®]COLOR, UNIQ[®]MICA, UNIQ[®]CURE, UNIQ[®]JET
以上信息是基于我们对产品的认识。客户应该基于自身的配方，生产和应用工艺作相应的测试和调整。我们不承担由本资料带来的任何责任，包括对该产品的专利权
本资料代替原先的资料手册- 中国印刷

© Copyright UNIQCHEM SHANGHAI CO., LTD.
Asia: UNIQCHEM Shanghai Co., Ltd.
EMEA: UNIQCHEM GmbH

Tel: +86 21 5433 6480 asia@uniqchem.com
Tel: +49 5921 853 7428 eu@uniqchem.com