


UNIQ[®] FOAM 120 S

Solution of non-silicone defoaming polymers

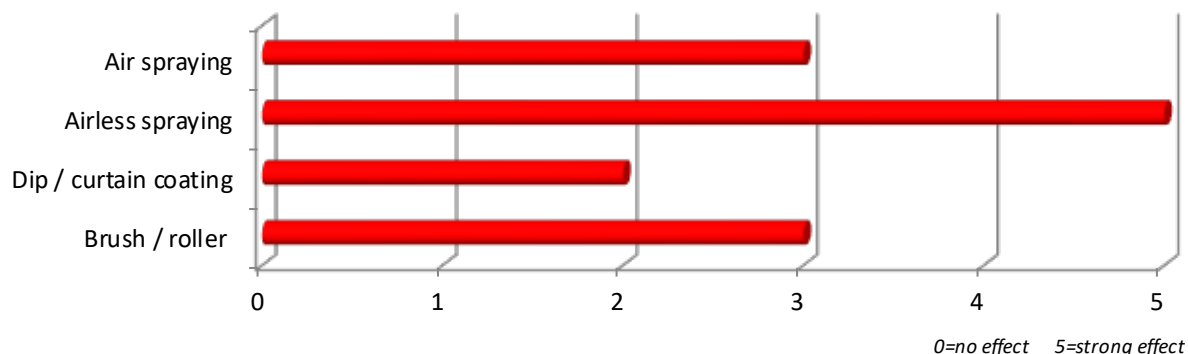

UNIQ[®] FOAM 120 S is a strong defoamer suitable for all solvent borne coating systems. It prevents the formation of foam during the manufacture and filling.

The additive has an immediate foam-destroying effect and does not have influence on the intercoat adhesion.

Due to the strong defoaming performances, the product is less suitable for high gloss clear coatings. Influence of transparency in clear systems should be evaluated.

Special Features

- Solvent-borne applications
- Strong defoaming effect
- does not interfere intercoat adhesion
- Silicone-free
- Heat stable

Application

Architectural coatings	■
Wood and furniture coatings	■
Automotive and refinish coatings	■
Can/coil coatings	■
Industrial coatings	■

highly recommended ■

recommended □

Product Specification

Density 20°C	0.8 g/cm ³
Flashpoint	30°C
Color	Max. 1
Appearance	Slight yellowish liquid

Addition levels

- Based on total formulation: 0.1 – 1.0%
Added in grinding stage or under high shear forces incorporation.

Due to its strong incompatibility, the influence upon the transparency of clear systems or other surface defects must be evaluated.

Packaging

- 22 kg
- 150 kg

Shelf life

UNIQ[®] FOAM 120 S should be stored in a cool dry place. When kept in an original unopened container, it will keep up to 5 years from the date of manufacture.