


UNIQ® FOAM LP2537

Non-Silicone emulsion Defoamer for water based systems

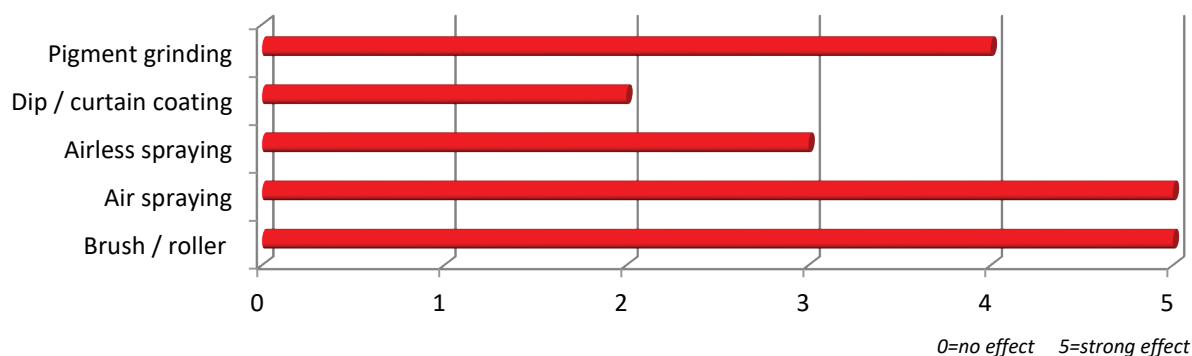

Special Features

- Workable pH range 4.0-9.0
- Can be added in all stages
- Also suited for grinding processes
- Silicone free

Application

- Emulsion paints
- Acrylic binders
-

Product Specification

pH	7.0 – 8.5
Density	1.02 g/ml
Refractive index	
Appearance	white ivory liquid

Addition levels

- The dosage amount is between 0.1-1.0%. Optimum level of defoamer needs to be identified by some experiments.

Packaging

- 25 kg
- 190 kg

Storage

UNIQ®FLOW LP2537 should be stored in a cool dry place between 5 and 35 °C. When kept in an original unopened container, the shelf life is 1 years from the date of manufacture.