


# UNIQ<sup>®</sup> FOAM LP2591

Water based silicone defoamer

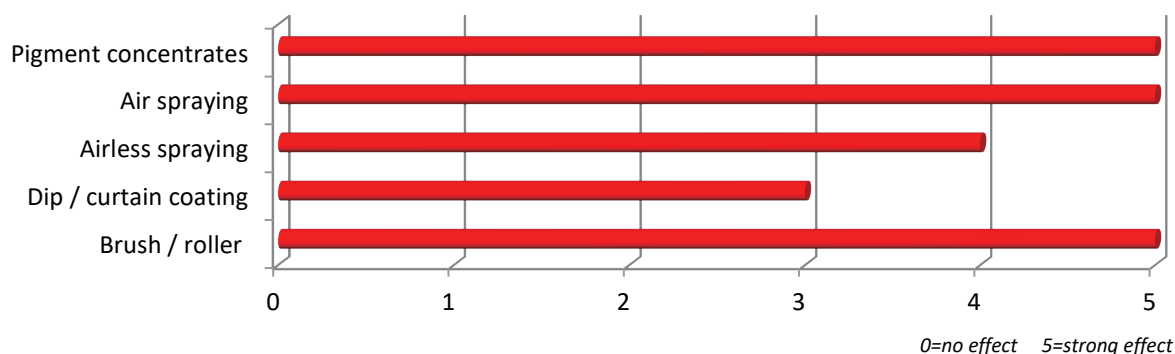

**UNIQ<sup>®</sup> FOAM LP2591** is a modified silicone defoaming agent used in water-based systems, showing excellent compatibility for easy use in various systems. It can be used for the preparation of pigment slurry and pigment pastes, especially inorganic pigment grinding stage. Also the defoamer is very well suited for air spraying application, for elimination of micro-foam.

## Special Features

- Water based applications
- Strong defoamer for grinding conditions
- Long term persistent
- Silicone based
- Excellent compatibility
- Heat stable

## Application

Architectural coatings	<input type="checkbox"/>
Wood and furniture coatings	<input checked="" type="checkbox"/>
Automotive and refinish coatings	<input type="checkbox"/>
Can/coil coatings	<input type="checkbox"/>
Pigment concentrates	<input checked="" type="checkbox"/>
Protective coatings	<input checked="" type="checkbox"/>
Industrial coatings	<input checked="" type="checkbox"/>

highly recommended

recommended

## Product Specification

Density 20°C  
Color  
Appearance

0,905 g/cm<sup>3</sup>  
Max. 1  
Slight yellow

## Addition levels

- Based on total formulation: 0.1 – 1.0 %

Most of time 0.3% is sufficient.

## Packaging

- 25 kg
- 190 kg

## Shelf life

**UNIQ<sup>®</sup> FOAM LP2591** should be stored in a cool dry place. When kept in an original unopened container, it will keep up to 2 years from the date of manufacture.