


# UNIQ<sup>®</sup> FOAM LP2599

Non-Silicone Defoamer

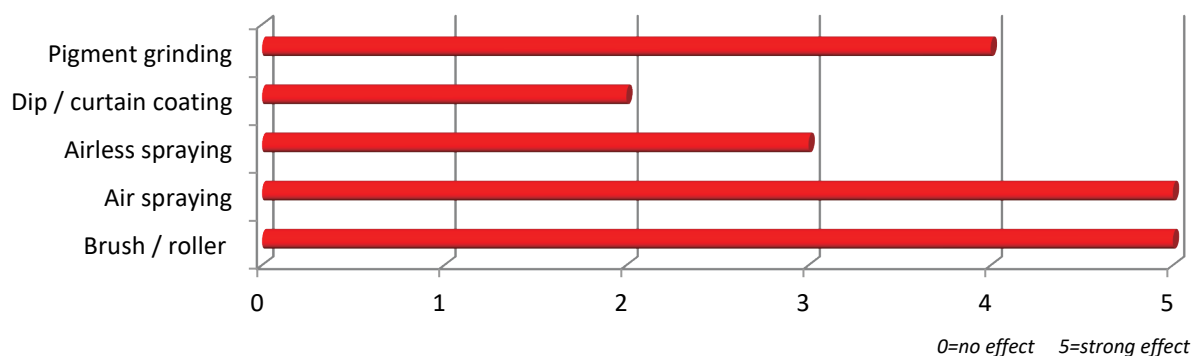

## Special Features

- Workable pH range 4.0-9.0
- Can be added in all stages
- Also suited for grinding processes
- Silicone free
- good against micro foam

## Application

- Emulsion paints
- Acrylic binders
- Water based paint and ink systems

## Product Specification

Density	0,92 g/ml
Refractive index	
Appearance	yellowish liquid

## Addition levels

- The dosage amount is between 0.1-1.0%. Optimum level of defoamer needs to be identified by some experiments.

## Packaging

- 25 kg
- 190 kg

## Storage

**UNIQ<sup>®</sup>FLOW LP2599** should be stored in a cool dry place between 5 and 35 °C. When kept in an original unopened container, the shelf life is 1 years from the date of manufacture.