


UNIQ[®] LIGHT 930

UV absorber

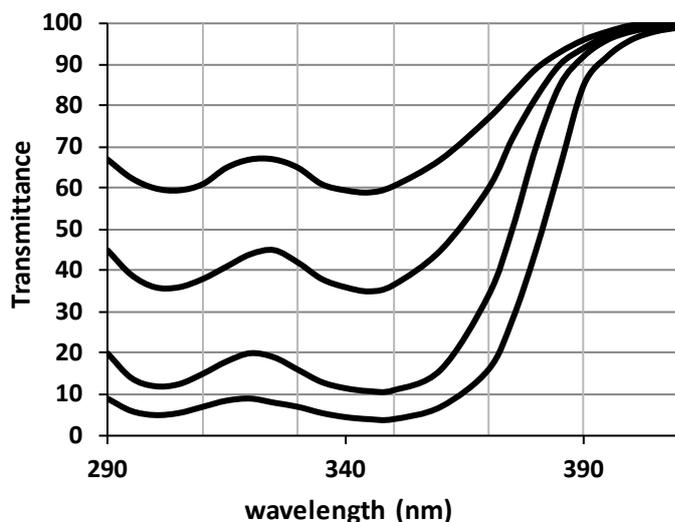

Explanation for 40 µm film:

Top line: 0.001% LS 930, corresponds to 0.25%
 Second line: 0.002% LS 930, corresponds to 0.50%
 Third line: 0.004% LS 930, corresponds to 1.0%
 Bottom line: 0.006% LS 930, corresponds to 1.5%

General **UNIQ[®] LIGHT 930** is a liquid UV absorber of the hydroxyphenyl-benzotriazole class specifically developed for coatings. The product is miscible with all common solvents but also easily incorporated into water borne systems. In view of the high durability demands, its high temperature and extraction resistance makes it especially suitable for industrial and automotive coatings. Because of its broad UV absorption, **UNIQ[®] LIGHT 930** also provides efficient protection to light sensitive substrates such as wood and plastics.

Special Features

- Liquid
- Suitable for solvent- and water based
- Broad UV absorption
- Especially suitable for clear coatings

Application

| | |
|----------------------------------|-------------------------------------|
| Architectural coatings | <input type="checkbox"/> |
| Wood and furniture coatings | <input checked="" type="checkbox"/> |
| Automotive and refinish coatings | <input checked="" type="checkbox"/> |
| Can/coil coatings | <input checked="" type="checkbox"/> |
| Protective coatings | <input checked="" type="checkbox"/> |

highly recommended
 recommended

Product Specification

| | |
|--------------|------------------------|
| Viscosity | 7400 mPas |
| Density 20°C | 1.17 g/cm ³ |
| Color | Light yellowish liquid |

Addition levels

| | |
|-----------------------|------------|
| OEM/Refinish coatings | 1.0 – 3.0% |
| Industrial coatings | 1.0 – 3.0% |
| Water based coatings | 1.0 – 3.0% |

Packing

- 25 kg
- 200 kg

Shelf life

UNIQ[®] LIGHT 930 should be stored in a cool dry place. When kept in an original unopened container, it will keep up to 3 years from the date of manufacture.