


UNIQ[®] LIGHT 940

UV absorber

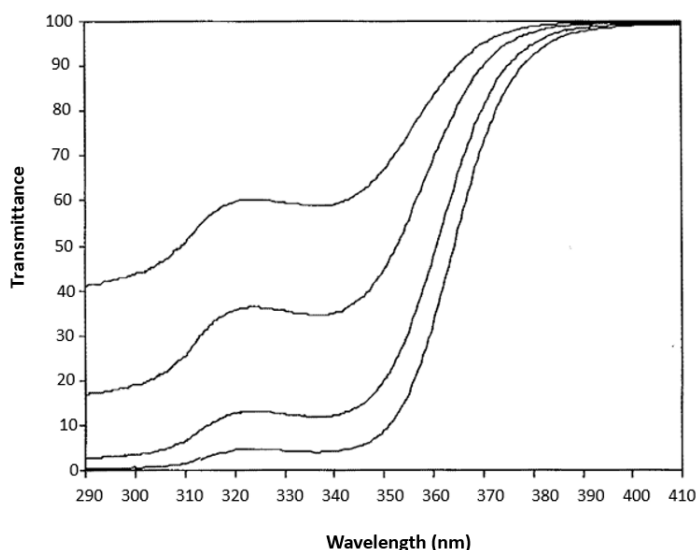

Explanation for 40 µm film:

Top line: 0.001% LS 940, corresponds to 0.25%
 Second line: 0.002% LS 940, corresponds to 0.50%
 Third line: 0.004% LS 940, corresponds to 1.0%
 Bottom line: 0.006% LS 940, corresponds to 1.5%

UNIQ[®] LIGHT 940 is a liquid UV absorber of the triazine class specifically developed for coatings. The product can be used in solvent-borne, solvent-free, UV-Curing and water borne systems. With excellent high temperature stability and environmental durability, **UNIQ[®] LIGHT 940** is especially suitable for industrial and automotive coatings with high performance and durability requirements. **UNIQ[®] LIGHT 940** its own light color and excellent light stability make it the best choice for all light-colored coatings, and it is also particularly suitable for UV-cured coatings.

Special Features

- Liquid
- Suitable for solvent, UV Curing and water based
- High light Stability and Excellent long –term performance
- Low migration effect, high concentration and high efficiency
- Excellent heat stability and environmental durability

Application

Wood and furniture coatings	<input type="checkbox"/>
Industrial coating	<input checked="" type="checkbox"/>
Automotive and refinish coatings	<input checked="" type="checkbox"/>
Can/coil coatings	<input checked="" type="checkbox"/>
UV Curing coatings	<input checked="" type="checkbox"/>

highly recommended ☒
 recommended ☐

Product Specification

Density 20°C
 Color

1.066 g/cm³
 Light yellowish to
 yellow liquid

Addition levels

OEM/Refinish coatings	1.0 – 3.0 %
Industrial coatings	1.0 – 3.0 %
Water based coatings	1.0 – 3.0 %

Packing

- 25 kg
- 200 kg

Shelf life

UNIQ[®] LIGHT 940 should be stored in a cool dry place. When kept in an original unopened container, it will keep up to 1 years from the date of manufacture.